

1 **OCF “Essen” – Cloud spec updates for Core Spec Split – Core Technology WG CR 2945**

2
3
4
5

Legal Disclaimer

6 THIS IS A DRAFT SPECIFICATION DOCUMENT ONLY AND HAS NOT BEEN ADOPTED BY THE
7 OPEN CONNECTIVITY FOUNDATION. THIS DRAFT DOCUMENT MAY NOT BE RELIED UPON
8 FOR ANY PURPOSE OTHER THAN REVIEW OF THE CURRENT STATE OF THE DEVELOPMENT
9 OF THIS DRAFT DOCUMENT. THE OPEN CONNECTIVITY FOUNDATION AND ITS MEMBERS
10 RESERVE THE RIGHT WITHOUT NOTICE TO YOU TO CHANGE ANY OR ALL PORTIONS
11 HEREOF, DELETE PORTIONS HEREOF, MAKE ADDITIONS HERETO, DISCARD THIS DRAFT
12 DOCUMENT IN ITS ENTIRETY OR OTHERWISE MODIFY THIS DRAFT DOCUMENT AT ANY
13 TIME. YOU SHOULD NOT AND MAY NOT RELY UPON THIS DRAFT DOCUMENT IN ANY WAY,
14 INCLUDING BUT NOT LIMITED TO THE DEVELOPMENT OF ANY PRODUCTS OR SERVICES.
15 IMPLEMENTATION OF THIS DRAFT DOCUMENT IS DONE AT YOUR OWN RISK AMEND AND
16 IT IS NOT SUBJECT TO ANY LICENSING GRANTS OR COMMITMENTS UNDER THE OPEN
17 CONNECTIVITY FOUNDATION INTELLECTUAL PROPERTY RIGHTS POLICY OR OTHERWISE.
18 IN CONSIDERATION OF THE OPEN CONNECTIVITY FOUNDATION GRANTING YOU ACCESS
19 TO THIS DRAFT DOCUMENT, YOU DO HEREBY WAIVE ANY AND ALL CLAIMS ASSOCIATED
20 HERewith INCLUDING BUT NOT LIMITED TO THOSE CLAIMS DISCUSSED BELOW, AS WELL
21 AS CLAIMS OF DETRIMENTAL RELIANCE.

22 The OCF logo is a trademark of Open Connectivity Foundation, Inc. in the United States or other
23 countries. *Other names and brands may be claimed as the property of others.

24 Copyright © 2018 - 2019 Open Connectivity Foundation, Inc. All rights reserved.

25 Copying or other form of reproduction and/or distribution of these works are strictly prohibited.
26



DRAFT

OCF Cloud Specification Essen

DRAFT

29

30

31

32

33

34

35

36

37

38

39

40

41

42

43

44

45

46

47

48

49

50

51

52

53

54

55

56

57

58

59

60

61

62

63

64

65

66

67

68

CONTENTS

1	Scope	1
2	Normative references	1
3	Terms, definitions, and abbreviated terms	2
3.1	Terms and definitions	2
3.2	Abbreviated terms	2
4	Document conventions and organization	3
4.1	Conventions	3
4.2	Notation	3
5	Overview	5
5.1	Introduction	5
5.2	Architecture	5
5.3	Interaction Flow	6
5.4	Cloud Operational Flow	7
5.4.1	Pre-requisites and OCF Cloud User Account Creation	8
5.4.2	Mediator registration with the OCF Cloud	8
5.4.3	Device provisioning by the Mediator	8
5.4.4	Device Registration with the OCF Cloud	9
5.4.5	Connection with the OCF Cloud	9
5.4.6	Publishing Links to the OCF Cloud RD	9
5.4.7	Client to Server communication through the OCF Cloud	9
5.4.8	Refreshing connection with the OCF Cloud	10
5.4.9	Closing connection with the OCF Cloud	10
5.4.10	Deregistering from the OCF Cloud	10
6	Resource model	12
6.1	OCF Cloud Resource Directory	12
6.1.1	Indirect discovery for lookup of the Resources	12
6.1.2	Resource Directory Definition	12
6.1.3	RD operational flows	14
6.2	CoAPCloudConf Resource	18
6.2.1	Introduction	18
6.2.2	Resource Definition	19
6.2.3	Error Handling	20
7	Network and connectivity	21
8	Functional interactions	22
8.1	Onboarding, Provisioning, and Configuration	22
8.1.1	Overview	22
8.1.2	Use of Mediator	22
8.1.3	Device Connection to the OCF Cloud	25

69	8.1.4	Device Registration with the OCF Cloud	25
70	8.2	Resource Publication	26
71	8.3	Client Registration with the OCF Cloud	27
72	8.4	Resource Discovery	27
73	8.5	Device Deregistration from the OCF Cloud.....	29
74	9	Security	29
75	Annex A (normative)	Swagger2.0 definitions	30
76	A.1	List of Resource Type definitions	30
77	A.2	Resource directory resource	30
78	A.2.1	Introduction	30
79	A.2.2	Well-known URI	30
80	A.2.3	Resource type	30
81	A.2.4	OpenAPI 2.0 definition.....	30
82	A.2.5	Property definition	35
83	A.2.6	CRUDN behaviour	35
84	A.3	CoAP Cloud Configuration Resource	36
85	A.3.1	Introduction	36
86	A.3.2	Example URI	36
87	A.3.3	Resource type	36
88	A.3.4	OpenAPI 2.0 definition.....	36
89	A.3.5	Property definition	39
90	A.3.6	CRUDN behaviour	40
91			
92			

93	
94	
95	
96	Figure 1 – OCF Cloud Architecture 6
97	Figure 2 – OCF Cloud interaction model 7
98	Figure 3 – Overall Operational State Machine 12
99	Figure 4 – Indirect discovery of Resources by via an RD 12
100	Figure 5 – RD discovery and RD supported query of Resources support..... 14
101	Figure 7 – Registration with OCF Cloud 22
102	Figure 8 – Device Provisioning by the Mediator 25
103	Figure 9 – Resource publication to the OCF Cloud..... 27
104	Figure 10 – Resource discovery through OCF Cloud..... 28
105	Figure 11 – Request routing through OCF Cloud..... 29
106	
107	

Tables

108	
109	
110	Table 1 – OCF Cloud Interaction Flow7
111	Table 2 – "oic.wk.rd" Resource Type definition 13
112	Table 3 – "oic.wk.rd" Properties 13
113	Table 4 – CoAPCloudConf Resource 19
114	Table 5 – oic.r.coapcloudconf Resource Type definition.....20
115	Table 6 – Device to OCF Cloud Registration Flow.....22
116	Table 7 – Device Provisioning by the Mediator.....25
117	Table A.1 – Alphabetized list of resources 30
118	Table D-22 – The Property definitions of the Resource with type "rt" = "oic.wk.rd".35
119	Table D-23 – The CRUDN operations of the Resource with type "rt" = "oic.wk.rd".....35
120	Table A.2 – The Property definitions of the Resource with type "rt" = "oic.r.coapcloudconf". .39
121	Table A.3 – The CRUDN operations of the Resource with type "rt" = "oic.r.coapcloudconf"...40
122	

DRAFT

123 1 Scope

124 This document defines functional extensions to the capabilities defined in ISO/IEC 30118-1:2018
125 to meet the requirements of the OCF Cloud. This document specifies new Resource Types to
126 enable the functionality and any extensions to the existing capabilities defined in ISO/IEC 30118-
127 1:2018.

128 2 Normative references

129 The following documents are referred to in the text in such a way that some or all of their content
130 constitutes requirements of this document. For dated references, only the edition cited applies. For
131 undated references, the latest edition of the referenced document (including any amendments)
132 applies.

133 ISO/IEC 30118-1:2018 *Information technology -- Open Connectivity Foundation (OCF)*
134 *Specification -- Part 1: Core specification*

135 <https://www.iso.org/standard/53238.html>

136 Latest version available at: https://openconnectivity.org/specs/OCF_Core_Specification.pdf

137 ISO/IEC 30118-2:2018 *Information technology -- Open Connectivity Foundation (OCF)*
138 *Specification -- Part 2: Security specification*

139 <https://www.iso.org/standard/74239.html>

140 Latest version available at: https://openconnectivity.org/specs/OCF_Security_Specification.pdf

141 OCF Wi-Fi Easy Setup, *Open Connectivity Foundation Wi-Fi Easy Setup, Version 2.0.1*

142 Latest version available at:

143 https://openconnectivity.org/specs/OCF_Wi-Fi_Easy_Setup_Specification.pdf

144 IETF RFC 6749, *The OAuth 2.0 Authorization Framework*, October 2012

145 <https://tools.ietf.org/html/rfc6749>

146 IETF RFC 6750, *The OAuth 2.0 Authorization Framework: Bearer Token Usage*, October 2012

147 <https://tools.ietf.org/html/rfc6750>

148 IETF RFC 8323, *CoAP (Constrained Application Protocol) over TCP, TLS, and WebSockets*,
149 February 2018

150 <https://tools.ietf.org/html/rfc8323>

151 OpenAPI specification, *fka Swagger RESTful API Documentation Specification*, Version 2.0

152 <https://github.com/OAI/OpenAPI-Specification/blob/master/versions/2.0.md>

153

154 **3 Terms, definitions, and abbreviated terms**

155 **3.1 Terms and definitions**

156 For the purposes of this document, the terms and definitions given in ISO/IEC 30118-1:2018 and
157 ISO/IEC 30118-2:2018 and the following apply.

158 ISO and IEC maintain terminological databases for use in standardization at the following
159 addresses:

160 – ISO Online browsing platform: available at <https://www.iso.org/obp>

161 – IEC Electropedia: available at <http://www.electropedia.org/>

162 **3.1.1**

163 **Cloud Provider**

164 entity or organization that hosts an OCF Cloud (3.1.2).

165 **3.1.2**

166 **OCF Cloud**

167 an OCF Cloud is not an OCF Device, but a logical entity that is owned by the Cloud Provider (3.1.1).

168 An OCF Cloud is authorised to communicate with a Device on behalf of the OCF Cloud User.

169 **3.1.3**

170 **Resource Directory**

171 a set of descriptions of Resources where the actual Resources are held on Servers external to the
172 entity hosting the Resource Directory (3.1.3), allowing lookups to be performed for those Resources

173 **3.2 Abbreviated terms**

174 **3.2.1**

175 **UX**

176 User Experience

177

178 **4 Document conventions and organization**

179 **4.1 Conventions**

180 In this document a number of terms, conditions, mechanisms, sequences, parameters, events,
181 states, or similar terms are printed with the first letter of each word in uppercase and the rest
182 lowercase (e.g., Network Architecture). Any lowercase uses of these words have the normal
183 technical English meaning.

184 **4.2 Notation**

185 In this document, features are described as required, recommended, allowed or DEPRECATED as
186 follows:

187 Required (or shall or mandatory)(M).

- 188 – These basic features shall be implemented to comply with Core Architecture. The phrases "shall
189 not", and "PROHIBITED" indicate behaviour that is prohibited, i.e. that if performed means the
190 implementation is not in compliance.

191 Recommended (or should)(S).

- 192 – These features add functionality supported by Core Architecture and should be implemented.
193 Recommended features take advantage of the capabilities Core Architecture, usually without
194 imposing major increase of complexity. Notice that for compliance testing, if a recommended
195 feature is implemented, it shall meet the specified requirements to be in compliance with these
196 guidelines. Some recommended features could become requirements in the future. The phrase
197 "should not" indicates behaviour that is permitted but not recommended.

198 Allowed (may or allowed)(O).

- 199 – These features are neither required nor recommended by Core Architecture, but if the feature
200 is implemented, it shall meet the specified requirements to be in compliance with these
201 guidelines.

202 DEPRECATED.

- 203 – Although these features are still described in this document, they should not be implemented
204 except for backward compatibility. The occurrence of a deprecated feature during operation of
205 an implementation compliant with the current document has no effect on the implementation's
206 operation and does not produce any error conditions. Backward compatibility may require that
207 a feature is implemented and functions as specified but it shall never be used by
208 implementations compliant with this document.

209 Conditionally allowed (CA)

- 210 – The definition or behaviour depends on a condition. If the specified condition is met, then the
211 definition or behaviour is allowed, otherwise it is not allowed.

212 Conditionally required (CR)

- 213 – The definition or behaviour depends on a condition. If the specified condition is met, then the
214 definition or behaviour is required. Otherwise the definition or behaviour is allowed as default
215 unless specifically defined as not allowed.

216

217 Strings that are to be taken literally are enclosed in "double quotes".

218 Words that are emphasized are printed in *italic*.

DRAFT

219 **5 Overview**

220 **5.1 Introduction**

221 An OCF Cloud extends the use of CoAP to enable a Device to interact with a cloud by utilizing
222 following features

- 223 – CoAP over TCP protocol defined in ISO/IEC 30118-1:2018
- 224 – The requirements within this document including those for a Resource Directory
- 225 – Security requirements and SVRs defined within the ISO/IEC 30118-2:2018

226 Devices which are not within a single local network may interact with each other using CoAP over
227 TCP (see ISO/IEC 30118-1:2018) via an OCF Cloud. At any point in time, a Device is configured
228 to use at most one OCF Cloud. The OCF Cloud groups Devices that belong to same OCF Cloud
229 User under an OCF Cloud created User ID. All the Devices registered to the OCF Cloud and
230 belonging to the same User ID can communicate with each other subject to the Device(s)
231 authorising the OCF Cloud in the ACE2 policies.

232 Annex A specifies the Resource Type definitions using the schema defined in the
233 OpenAPI specification as the API definition language that shall be followed by an OCF Device
234 realizing the Resources specified in this document.


235 Note that an OCF Cloud is not an OCF Device, but a logical entity that is owned by the Cloud
236 Provider. An OCF Cloud is authorized to communicate with a Device by the OCF Cloud User

237 **5.2 Architecture**

238 The OCF Cloud is a logical entity to which an OCF Device communicates via a persistent TLS
239 connection. It encapsulates two functions:

- 240 – an account server function which is a logical entity that handles Device registration, Access
241 Token validation and handles sign-in and token-refresh requests from the Device. An OCF
242 Cloud User creates offline an account on the account server (by means of the mediator). The
243 account server is then also used to register the Devices (Clients and Servers) per account.
244 Note that all accounts are fully separated, e.g. logging into account A does not give access to
245 Devices registered to account B.
- 246 – a Resource Directory as defined by this document. The Resource Directory exposes Resource
247 information published by Devices. A Client, when discovering Devices, receives a response
248 from the Resource Directory on behalf of the Device. With information included in the response
249 from the Resource Directory, the Client may connect to the Device via the OCF Cloud.

250 This is illustrated in Figure 1.

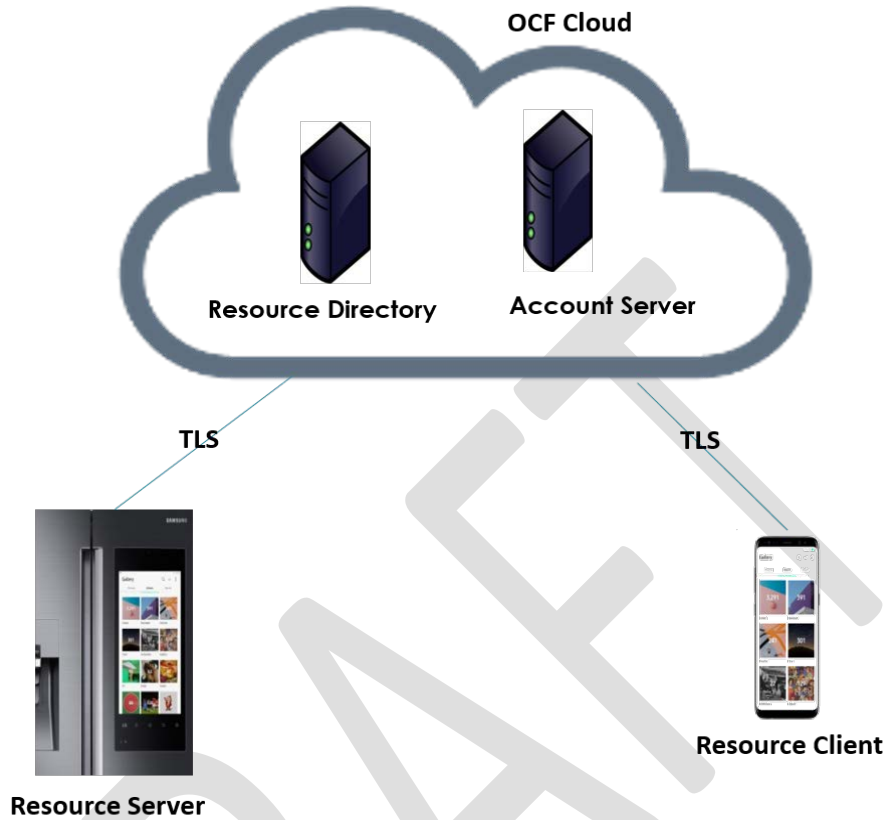

251

252

Figure 1 – OCF Cloud Architecture

253 **5.3 Interaction Flow**

254 This clause describes how the elements with the overall OCF Cloud interact. Figure 2 provides an
255 overall introduction, Table 1 provides additional context to the elements in the flow.

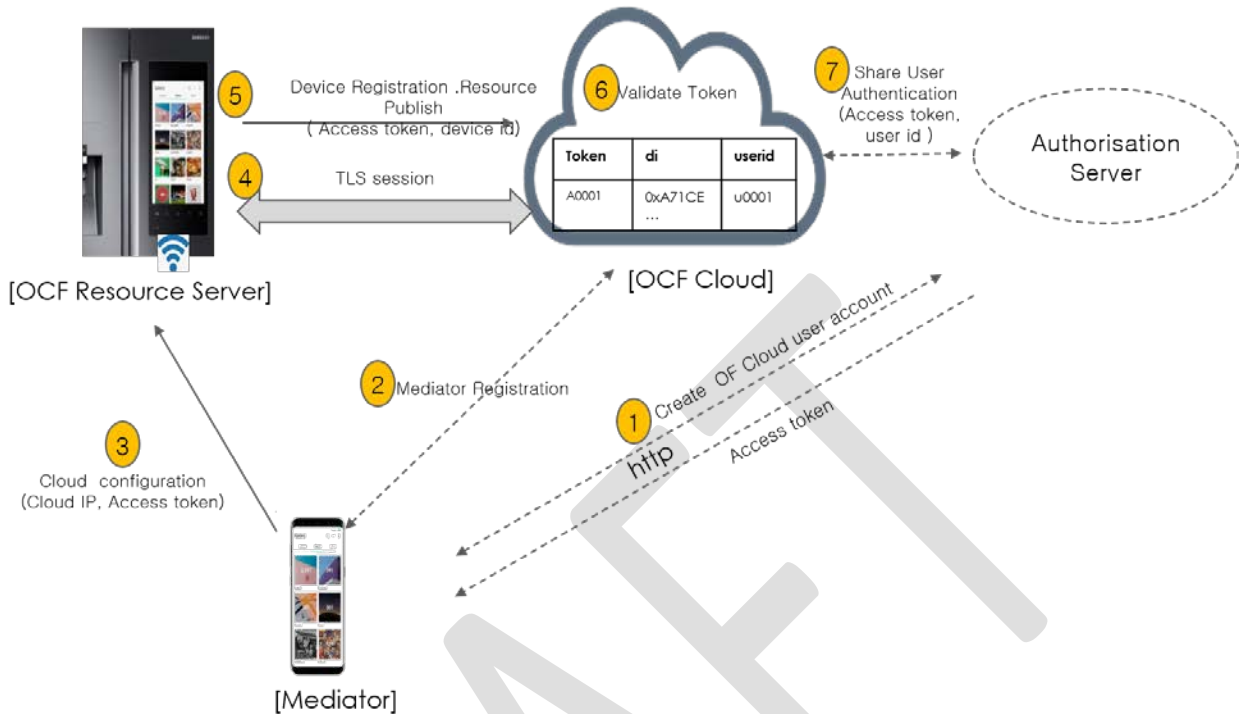


Figure 2 – OCF Cloud interaction model

Table 1 – OCF Cloud Interaction Flow

Steps	Description
1	The Mediator obtains an Access Token for the OCF Cloud User from an Authorisation Provider
2	The Mediator registers with the OCF Cloud
3	The Mediator provisions "oic.r.coapcloudconf" on the Device with an Access Token, the URL of the OCF Cloud, the identity (UUID) of the OCF Cloud, and optionally an Authorisation Provider Name.
4, 5	The Device establishes a TLS session to the OCF Cloud and subsequently registers with the OCF Cloud
6, 7	The OCF Cloud validates the registration request and authorises the Access Token. Returning information to the Device in the "uid" of the OCF Cloud User and the expiration information of the Access Token.

260

261 In the case where the OCF Cloud also acts as the Authorisation Server step 1 from Table 1 may
 262 be between the Mediator and the OCF Cloud in which case step 7 is not required.

263 **5.4 Cloud Operational Flow**

264 The sub-clauses listed provide an informative overview of the flow which results on a Device being
 265 registered with an OCF Cloud and Client interaction with that Device. The clauses provide

266 references to the applicable clauses within this document and other documents that provide
267 normative details.

268 The flow consists of the following high-level steps:

- 269 – Pre-requisites and OCF Cloud User account creation (see 5.4.1)
- 270 – Mediator registration with the OCF Cloud (see 5.4.2)
- 271 – Device provisioning by the Mediator (see 5.4.3)
- 272 – Device registration with the OCF Cloud (see 5.4.4)
- 273 – Device connection with the OCF Cloud (see 5.4.5)
- 274 – Devices Publishing Links to the OCF Cloud RD (see 5.4.6)
- 275 – Client to Server communication through the OCF Cloud (see 5.4.7)
- 276 – Device refreshing connection with the OCF Cloud (see 5.4.8)
- 277 – Device closing connection with the OCF Cloud (see 5.4.9)
- 278 – Device de-registering from the OCF Cloud (see 5.4.10)

279 **5.4.1 Pre-requisites and OCF Cloud User Account Creation**

280 The OCF Cloud User has a Device that they want to hook up to the OCF Cloud so that they can
281 access it remotely.

282 The Device is onboarded to the OCF Network as defined in ISO/IEC 30118-2:2018.

283 The OCF Cloud User makes use of a Mediator to provision the Device. A Mediator is a logical
284 function that may be on the OCF Cloud User's personal device (e.g. phone) or elsewhere. The
285 Mediator is configured with or through some out of band process to obtain the URL of the OCF
286 Cloud (e.g. the Mediator may be an application from the Cloud Provider).

287 The OCF Cloud User has access credentials for authenticating the OCF Cloud User to the
288 Authorisation Provider (i.e. user name/password or similar)

289 **5.4.2 Mediator registration with the OCF Cloud**

290 See 8.1.2.2, 8.1.2.3.

291 Via some trigger (e.g. a UX or other out of bounds mechanism), the Mediator authenticates the
292 OCF Cloud User to the Authorisation Provider and requests Access Token from an Authorisation
293 Provider.

294 The Mediator registers by providing its Access Token to the OCF Cloud which verifies the token
295 and creates a User ID with which the Mediator is associated. All instances of a Mediator for the
296 same OCF Cloud User will be associated with the same User ID. Similarly, this same User ID may
297 be used to assign multiple Devices to the same OCF Cloud User

298 **5.4.3 Device provisioning by the Mediator**

299 See 8.1.2.3; see also ISO/IEC 30118-2:2018 clause 7.5.2

300 The Mediator connects to the Device through normal OCF processes. The Mediator then requests
301 an Access Token from the OCF Cloud for the Device being provisioned. The Mediator updates the
302 "oic.r.coapcloudconf" Resource on the Device with the Access Token received from the OCF Cloud,
303 the OCF Cloud URI, and the OCF Cloud UUID. The Mediator may also provide the Auth Provider

304 Name. Note that this Access Token may only be used one time for the initial Device Registration
305 with the OCF Cloud.

306 **5.4.4 Device Registration with the OCF Cloud.**

307 See 8.1.3 and 8.1.4; see also ISO/IEC 30118-2:2018 clauses 10.5, 13.11, 13.12

308 On configuration of the "oic.r.coapcloudconf" Resource by the Mediator, the Device establishes a
309 TLS connection with the OCF Cloud using the URI that was provisioned, and the Device's
310 manufacturer certificate and the trust anchor certificate(s) for OCF Cloud certificate validation, both
311 of which were installed by the Device manufacturer. The combination of the Device's manufacturer
312 certificate and OCF Cloud User's Access Token ensures the interactions between the OCF Cloud
313 and OCF Devices are within the OCF Cloud User's domain.

314 To register with the OCF Cloud, the Device then sends an UPDATE operation to the Account
315 Resource on the OCF Cloud which includes the Access Token that was provisioned in the
316 "oic.r.coapcloudconf" Resource. Note that the OCF Cloud maintains a unique instance of the
317 Account Resource for every Device.

318 If the UPDATE is successfully validated, then the OCF Cloud provides an UPDATE response that
319 may provide updated values for the Access Token and details on the lifetime (expiration) of that
320 Token. The OCF Cloud also includes the User ID to which the Device is associated. All values
321 returned are stored securely on the Device. The returned Access Token is not written to the
322 "oic.r.coapcloudconf" Resource.

323 The Device is now registered with the OCF Cloud.

324 **5.4.5 Connection with the OCF Cloud**

325 See 8.1.4, see also ISO/IEC 30118-2:2018 clause 13.12

326 In order to enable passing data between the Device and the OCF Cloud, the Device sends an
327 UPDATE request to the Session Resource; once validated, the OCF Cloud sends a response
328 message that includes the remaining lifetime of the associated Access Token. The Device now has
329 an active connection and can exchange data.

330 **5.4.6 Publishing Links to the OCF Cloud RD**

331 See 8.2; see also ISO/IEC 30118-2:2018 clause 10.5, ISO/IEC 30118-1:2018 clause 11.3.6.

332 Once the TLS connection has been established to the OCF Cloud the Device exposes its Resources
333 in the Resource Directory in the OCF Cloud so that they may be seen/accessed remotely.

334 **5.4.7 Client to Server communication through the OCF Cloud**

335 See 8.3, 8.4; see also ISO/IEC 30118-2:2018 clause 10.5.

336 As for a Server, Clients follow this same process and register with the OCF Cloud.

337 The OCF Cloud allows communication between all of an OCF Cloud User's Devices based on the
338 fact that they have the same User ID.

339 When the Client attempts CRUDN actions on the Links hosted by the OCF Cloud, the OCF Cloud
340 forwards those requests to the Device. The Device responds to the OCF Cloud which then proxies
341 the response to the C

342 lient (i.e. Client -> OCF Cloud -> Device -> OCF Cloud -> Client).

343 **5.4.8 Refreshing connection with the OCF Cloud**

344 See ISO/IEC 30118-2:2018 clause 13.13.

345 When (or before) the Access Token expires, the Device refreshes its token by sending an UPDATE
346 request to the Token Refresh Resource.

347 **5.4.9 Closing connection with the OCF Cloud**

348 See ISO/IEC 30118-2:2018 clause 13.12.

349 To log out of the OCF Cloud the Device sends an UPDATE request to the Session Resource
350 indicating a "login" status of "false". This does not delete or remove any of the Device Registration
351 information. The Device may log back into the OCF Cloud at any point prior to expiration of the
352 Access Token.


353 **5.4.10 Deregistering from the OCF Cloud**

354 See 8.5; see also ISO/IEC 30118-2:2018 clause 13.10.

355 To deregister with the OCF Cloud, the Device sends a DELETE request message to the Account
356 Resource including its Access Token. The OCF Cloud sends a response message confirming that
357 the Device has been deregistered.

358 To connect to the OCF Cloud again, the Device has to re-follow the flow starting with Mediator
359 provisioning (see 5.4.3).

360 Figure 3 captures the state machine that is described by the informative operation flow provided in
361 5.4.

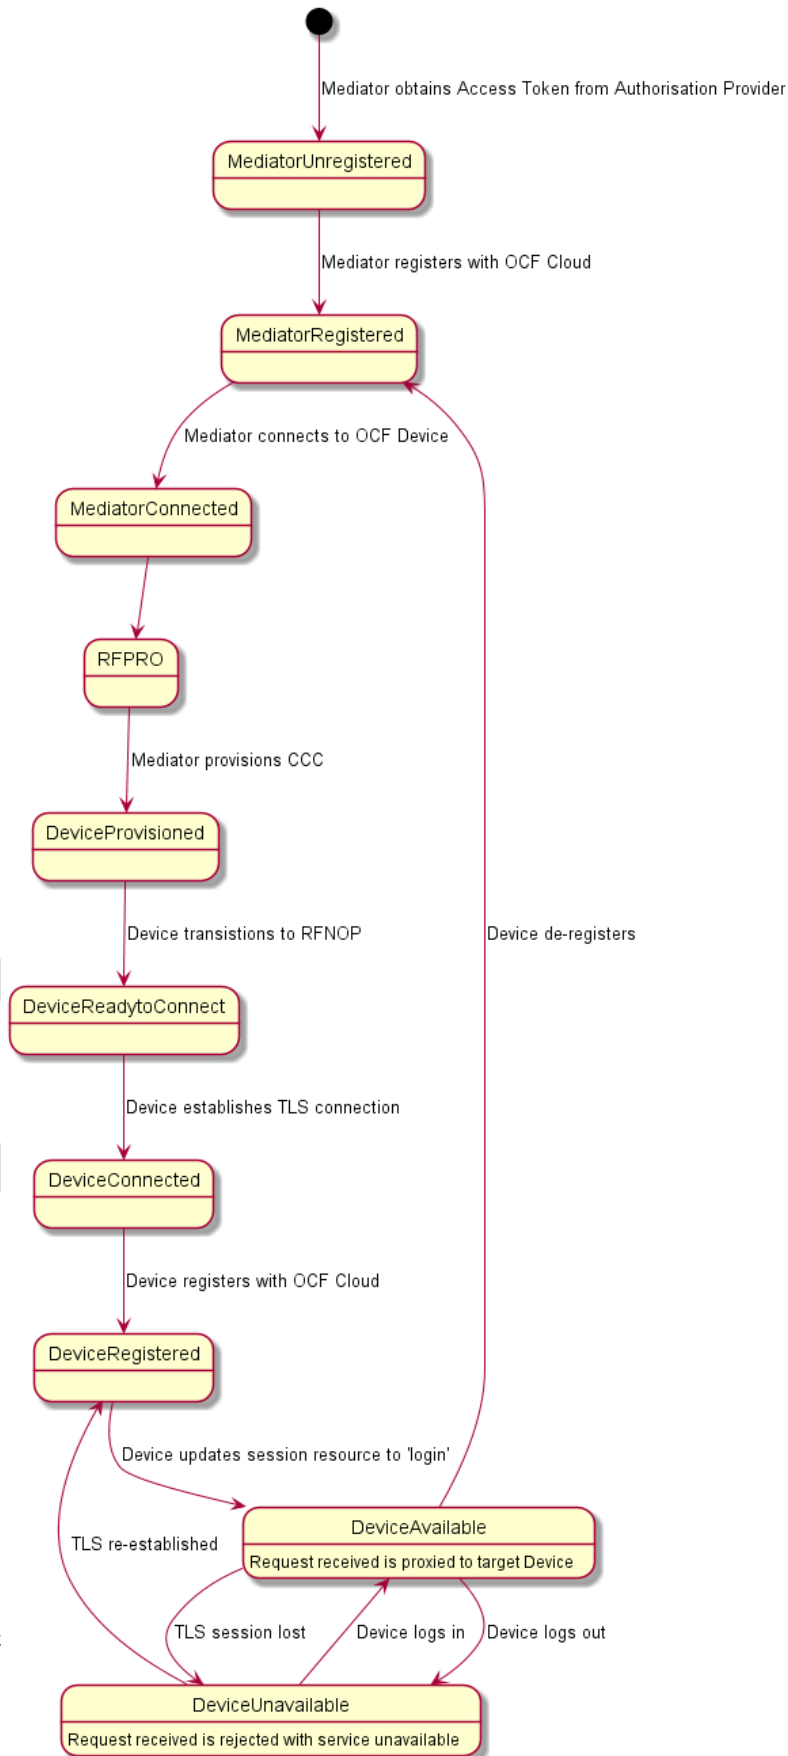

363

Figure 3 – Overall Operational State Machine

364

6 Resource model


365

6.1 OCF Cloud Resource Directory

366

6.1.1 Indirect discovery for lookup of the Resources

367 Indirect discovery is when a 3rd party, other than the discovering Device and the discovered Device,
368 assists with the discovery process. The 3rd party, called a Resource Directory (RD), only provides
369 information on Resources on behalf of another Device but does not host Resources on part of that
370 Device.

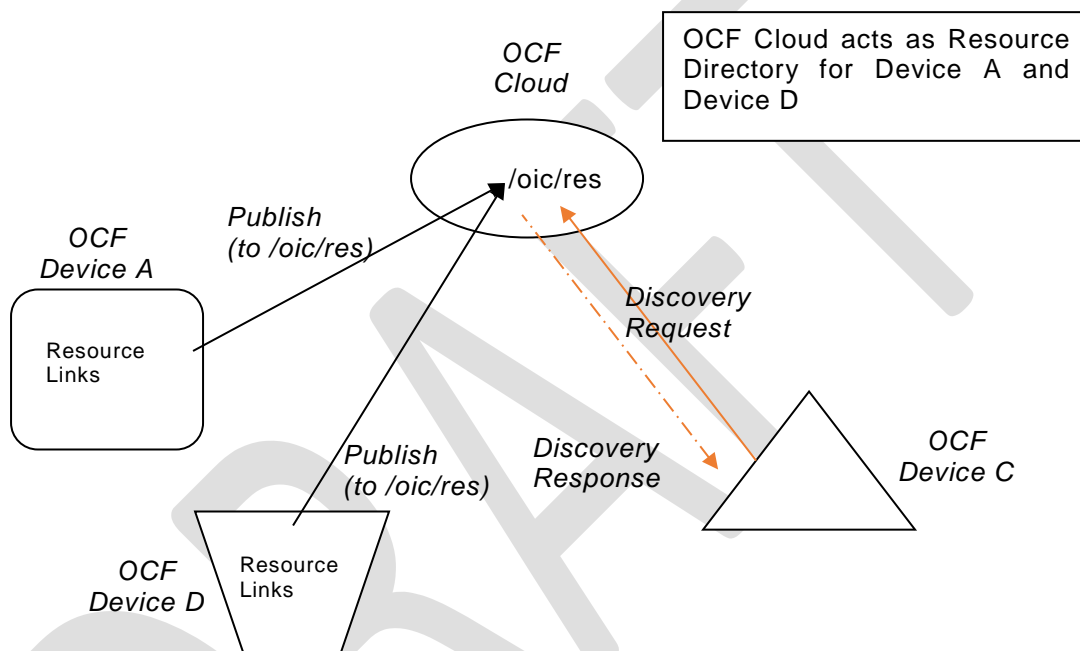

371

372

Figure 4 – Indirect discovery of Resources by via an RD

373 In Figure 4, the OCF Cloud acts as Resource Directory for Device A and Device D which are both
374 part of the same account. Device A and Device D publish their Resource information to the OCF
375 Cloud. Device C which is also part of the same account as Devices A and D, may query the OCF
376 Cloud to acquire the Resource information of Devices A and D.

377 Indirect discovery is useful for when Devices may not be on the same network and require
378 optimization for discovery or routing. Once Resources are discovered using indirect discovery, i.e.,
379 RD query, then the access to the Resource is done by a request sent to the endpoint exposed by
380 the RD for the Resource.

6.1.2 Resource Directory Definition

382 An OCF Cloud which acts as a Resource Directory (RD) will be involved in the following operations.

- 383 – *RD discovery* – the procedure by which publishing Devices discover an RD, in the case of the
384 OCF Cloud this is a direct result of Device registration with an OCF Cloud.

385 – *Resource publish* – the procedures with which Devices publish their Resource information, i.e.
 386 Links.

387 – *Resource exposure* – the feature with which RDs expose the Links hosted by the 3rd party
 388 Devices via their own "/oic/res".

389 An RD makes use of Resource Type "oic.wk.rd" defined in Table 2 and Table 3. An OCF Cloud that
 390 supports the capability to host indirect discovery shall expose an instance of the "oic.wk.rd"
 391 Resource Type in its "/oic/res" to announce that it serves as an RD. The use of the "oic.wk.rd"
 392 Resource Type is restricted to OCF Clouds only, a proximal network Device shall not expose the
 393 "oic.wk.rd" Resource Type.

394 The discoverable instance of "oic.wk.rd" shall allow only secure connections (e.g. OCF Endpoint
 395 with a scheme of "coaps" or "coaps+tcp"). A publishing Device sends an UPDATE request to
 396 "/oic/rd" with its Links in the payload to publish the Links in "/oic/res" of the RD. A publishing Device
 397 is responsible for ensuring the RD has the correct published Links exposed via its "/oic/res".

398 **Table 2 – "oic.wk.rd" Resource Type definition**

Pre-defined URI	Resource Type Title	Resource Type ID ("rt" value)	OCF Interfaces	Description	Related Functional Interaction
"/oic/rd"	Resource Directory	"oic.wk.rd"	"oic.if.baseline"	The Discoverable Resource Type through which an RD 1) facilitates its discovery and provides the criteria to select an RD and 2) allows Devices to publish their Links in "/oic/res" of the RD.	Discovery

399

400

401

Table 3 – "oic.wk.rd" Properties

Property title	Property name	Value type	Value rule	Unit	Access mode	Mandatory	Description
Selector	"sel"	"integer"	N/A	N/A	R	Yes	Provides the criteria for RD selection. An integer representing a value calculated by the RD. The value is in the range of 0 to 100. The lower the value, the more preferable the RD is.

402


403 An RD may be queried at its "/oic/res" Resource to find Resources hosted on other Devices. A
 404 publishing Device may publish all or a partial list of Resources they host to an RD. The RD then
 405 responds to queries for Resource discovery on behalf of the publishing Device. Note that only
 406 Devices that belong to the same account as the querying Device are visible in the exposed instance
 407 of "/oic/res". For general Resource discovery, the RD behaves like any other Server in responding
 408 to requests to "/oic/res".

409 **6.1.3 RD operational flows**

410 **6.1.3.1 Discovering an RD**

411 In Figure 5, a Device that wishes to publish its Resources first registers with the OCF Cloud that
412 hosts the RD and then publishes the desired Resource information.

413

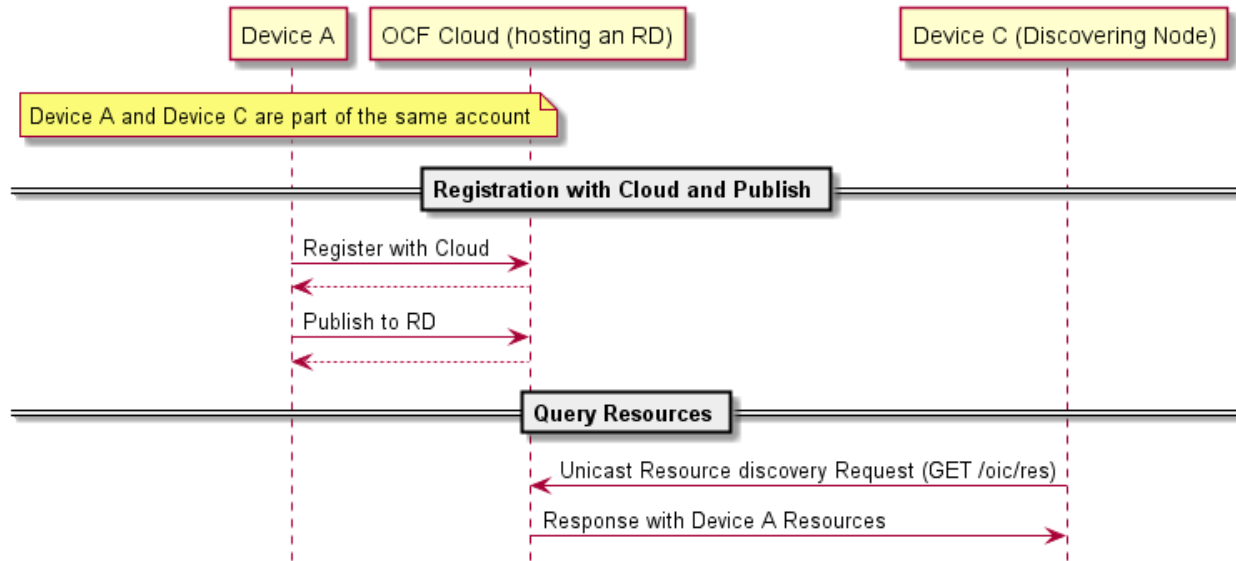

414

415

Figure 5 – RD discovery and RD supported query of Resources support

416 A Client that performs Resource discovery via an OCF Cloud RD does so via a unicast request to
417 the RD; the Resource Directory defined in this document does not support the use of multicast
418 queries to discover instances of an RD.

419 **6.1.3.2 Publish Resources**

420 **6.1.3.2.1 Overview**

421 After the selection process of an RD, a Device may push its Resource information to the selected
422 RD, i.e., publish the Links in its "/oic/res" to the "/oic/res" of the RD.

423 The publishing Device may decide to publish all Resources or just a few of the Resources on the
424 RD. At a minimum a publishing Device shall publish the mandatory Core Resources "/oic/d" and
425 "/oic/p" as well as Resources that are defined as mandatory for the Device Type being published.
426 The publishing Device should only publish Resources that are otherwise published to its own
427 "/oic/res"; a publishing Device should not publish non-Discoverable Resources or Resources
428 hosted by some other Device. A publishing Device shall respond to discovery requests on its
429 "/oic/res" Resource unless all its Discoverable Resources have been published in an RD.

430 **6.1.3.2.2 Publish: Push Resource information**

431 Resource information may be published using an UPDATE request sent to "/oic/rd".

432 A Device which hosts a Resource may publish the Resource information, i.e. the Link targeting the
433 Resource, to an RD by sending an UPDATE request with the Link in the payload. The published
434 Link shall be exposed through the "/oic/res" of the RD.

435 When a Device first publishes a Link or Links, it shall send an UPDATE request to the "/oic/rd"
436 Resource of the RD including the following key-value pairs in the payload:

- 437 – "di" –its value shall be the Device ID of the publishing Device, i.e. the "di" value of "/oic/d".
- 438 – "links" –its value shall be the array of Links to be published. Links may omit the "ins" Parameter
439 in which case the RD will assign a value for each Link. The supplied "ins" Parameter by the
440 Client is allowed to be overruled by the RD, e.g. an RD can ignore the supplied "ins" value.
- 441 – "ttl" –its value indicates how long (in seconds) the publishing Device requests the RD to keep
442 this published Link.

443 Notice that the payload shall carry the appropriate Content-Format of "application/vnd.ocf+cbor".

```
444 {  
445   "di": "e61c3e6b-9c54-4b81-8ce5-f9039c1d04d9",  
446   "links": [  
447     {  
448       "anchor": "ocf://e61c3e6b-9c54-4b81-8ce5-f9039c1d04d9"  
449       "href": "/myLightSwitch",  
450       "rt": ["oic.r.switch.binary"],  
451       "if": ["oic.if.a", "oic.if.baseline"],  
452       "p": {"bm": 3},  
453       "eps": [  
454         {"ep": "coaps://[fe80::b1d6]:1111", "pri": 2},  
455         {"ep": "coaps://[fe80::b1d6]:1122"},  
456         {"ep": "coaps+tcp://[2001:db8:a::123]:2222", "pri": 3}  
457       ]  
458     },  
459     {  
460       "anchor": "ocf://e61c3e6b-9c54-4b81-8ce5-f9039c1d04d9",  
461       "href": "/myLightBrightness",  
462       "rt": ["oic.r.brightness"],  
463       "if": ["oic.if.a", "oic.if.baseline"],  
464       "p": {"bm": 3},  
465       "eps": [  
466         {"ep": "coaps://[[2001:db8:a::123]:2222"}  
467       ]  
468     }  
469   ],  
470   "ttl": 600  
471 }
```

472 When an RD receives this initial UPDATE request, it determines whether to grant the request or
473 not. Upon granting the request, the RD shall send back an UPDATE response to the publishing
474 Device. The response shall include a payload with the same information as the original UPDATE
475 request with the following possible differences:

- 476 – For each Link, an "ins" Parameter shall be included in the response. The RD shall assign a
477 unique "ins" value identifying the Link among all the Links it advertises. If the publishing Device
478 included an "ins" value in the UPDATE request, the RD may use it as long as it doesn't match
479 any existing "ins" value in the published Links.
- 480 – The "ttl" Property Value shall be assigned by the RD and it shall be included in the response.
481 The RD should use the value included in the UPDATE request but may assign a value that is
482 lower if it is not able to honour the requested "ttl" value. After this time elapses, the RD shall
483 remove the Links. To keep a Link alive the publishing Device may update the "ttl" using the
484 UPDATE schema.

485 The RD shall add the new Links to its "/oic/res" and expose them to a valid discovery query, i.e.
486 RETRIEVE request:

```
487 {  
488   "di": "e61c3e6b-9c54-4b81-8ce5-f9039c1d04d9",  
489   "links": [  
490     {  
491       "anchor": "ocf://e61c3e6b-9c54-4b81-8ce5-f9039c1d04d9",  
492       "href": "/myLightSwitch",  
493       "rt": ["oic.r.switch.binary"],  
494       "if": ["oic.if.a", "oic.if.baseline"],  
495       "p": {"bm": 3},  
496       "eps": [  
497         {"ep": "coaps://[fe80:b1d6]:1111", "pri": 2},  
498         {"ep": "coaps://[fe80:b1d6]:1122"},  
499         {"ep": "coaps+tcp://[2001:db8:a::123]:2222", "pri": 3}  
500       ],  
501       "ins": 11235  
502     },  
503     {  
504       "anchor": "ocf://e61c3e6b-9c54-4b81-8ce5-f9039c1d04d9",  
505       "href": "/myLightBrightness",  
506       "rt": ["oic.r.brightness"],  
507       "if": ["oic.if.a", "oic.if.baseline"],  
508       "p": {"bm": 3},  
509       "eps": [  
510         {"ep": "coaps://[[2001:db8:a::123]:2222"}  
511       ],  
512       "ins": 112358  
513     }  
514   ].  
515   "ttl": 600  
516 }
```

517 6.1.3.3 Resource exposure

518 6.1.3.3.1 "/oic/res" and retrieving of the Resources

519 The "/oic/res" based discovery process for an OCF Cloud does not support the use of multicast. A
520 registered Client may discover Resources by sending a unicast RETRIEVE to "/oic/res". Only those
521 Resources for Devices that are registered with the same account as the Client are returned in a
522 response to the RETRIEVE.

523 Interaction with Resources discovered using the RD is done using the same mechanism and
524 methods as with Resources discovered by retrieving the "/oic/res" Resource of the Device hosting
525 the Resources (e.g., connect to the exposed endpoint and perform CRUDN operations on the
526 Resource).

527 The "/oic/res" response to a requesting Client includes the Links with the "anchor" Parameter
528 containing an OCF URI. The "/oic/res" response has a single array of Links. Each Link shall contain
529 the "anchor" Parameter of the value OCF URI where the authority component of <deviceId>
530 indicates the Device hosting the target Resource.

531 For example, an RD may return the following to a Client.

```
532 [  
533   {  
534     "anchor": "ocf://88b7c7f0-4b51-4e0a-9faa-cfb439fd7f49",  
535     "href": "/oic/res",
```

```
536     "rel": "self",
537     "rt": ["oic.wk.res"],
538     "if": ["oic.if.ll", "oic.if.baseline"],
539     "p": {"bm": 3},
540     "eps": [
541       {"ep": "coap://[2001:db8:a::b1d4]:77777"},
542       {"ep": "coaps://[2001:db8:a::b1d4]:33333"}
543     ],
544   },
545   {
546     "anchor": "ocf://88b7c7f0-4b51-4e0a-9faa-cfb439fd7f49",
547     "href": "/oic/d",
548     "rt": ["oic.wk.d", "oic.d.fan"],
549     "if": ["oic.if.r", "oic.if.baseline"],
550     "p": {"bm": 3},
551     "eps": [
552       {"ep": "coap://[2001:db8:a::b1d4]:77777"},
553       {"ep": "coaps://[2001:db8:a::b1d4]:33333"}
554     ],
555   },
556   {
557     "anchor": "ocf://88b7c7f0-4b51-4e0a-9faa-cfb439fd7f49",
558     "href": "/oic/p",
559     "rt": ["oic.wk.p"],
560     "if": ["oic.if.r", "oic.if.baseline"],
561     "p": {"bm": 3},
562     "eps": [
563       {"ep": "coaps://[2001:db8:a::b1d4]:33333"}
564     ],
565   },
566   {
567     "anchor": "ocf://88b7c7f0-4b51-4e0a-9faa-cfb439fd7f49",
568     "href": "/myFanIntrospection",
569     "rt": ["oic.wk.introspection"],
570     "if": ["oic.if.r", "oic.if.baseline"],
571     "p": {"bm": 3},
572     "eps": [
573       {"ep": "coaps://[2001:db8:a::b1d4]:33333"}
574     ],
575   },
576   {
577     "anchor": "ocf://88b7c7f0-4b51-4e0a-9faa-cfb439fd7f49",
578     "href": "/oic/rd",
579     "rt": ["oic.wk.rd"],
580     "if": ["oic.if.baseline"],
581     "p": {"bm": 3},
582     "eps": [
583       {"ep": "coaps://[2001:db8:a::b1d4]:33333"}
584     ],
585   },
586   {
587     "anchor": "ocf://88b7c7f0-4b51-4e0a-9faa-cfb439fd7f49",
588     "href": "/myFanSwitch",
589     "rt": ["oic.r.switch.binary"],
590     "if": ["oic.if.a", "oic.if.baseline"],
591     "p": {"bm": 3},
592     "eps": [
593       {"ep": "coaps://[2001:db8:a::b1d4]:33333"}
594     ]
595   }
}
```



```
595     ,
596     {
597         "anchor": "ocf://dc70373c-1e8d-4fb3-962e-017eaa863989",
598         "href": "/oic/d",
599         "rt": ["oic.wk.d", "oic.d.light"],
600         "if": ["oic.if.r", "oic.if.baseline"],
601         "p": {"bm": 3},
602         "eps": [
603             {"ep": "coap://[2001:db8:b::c2e5]:66666"},
604             {"ep": "coaps://[2001:db8:b::c2e5]:22222"}
605         ]
606     },
607     {
608         "anchor": "ocf://dc70373c-1e8d-4fb3-962e-017eaa863989",
609         "href": "/oic/p",
610         "rt": ["oic.wk.p"],
611         "if": ["oic.if.r", "oic.if.baseline"],
612         "p": {"bm": 3},
613         "eps": [
614             {"ep": "coaps://[2001:db8:b::c2e5]:22222"}
615         ]
616     },
617     {
618         "anchor": "ocf://dc70373c-1e8d-4fb3-962e-017eaa863989",
619         "href": "/myLightSwitch",
620         "rt": ["oic.r.switch.binary"],
621         "if": ["oic.if.a", "oic.if.baseline"],
622         "p": {"bm": 3},
623         "eps": [
624             {"ep": "coaps://[2001:db8:b::c2e5]:22222"}
625         ]
626     },
627     {
628         "anchor": "ocf://dc70373c-1e8d-4fb3-962e-017eaa863989",
629         "href": "/myLightBrightness",
630         "rt": ["oic.r.brightness"],
631         "if": ["oic.if.a", "oic.if.baseline"],
632         "p": {"bm": 3},
633         "eps": [
634             {"ep": "coaps://[2001:db8:b::c2e5]:22222"}
635         ]
636     }
637 ]
```

638

639 **6.2 CoAPCloudConf Resource**

640 **6.2.1 Introduction**

641 The CoAPCloudConf resource exposes configuration information for connecting to an OCF Cloud.
642 This is an optional discoverable Resource, which may additionally be included within the Easy
643 Setup Collection ("oic.r.easyssetup") and so used during the Easy Setup process as defined in
644 OCF Wi-Fi Easy Setup.

645 The CoAPCloudConf Resource shall expose only secure Endpoints (e.g. CoAPS); see the
646 ISO/IEC 30118-1:2018, clause 10.

647 **6.2.2 Resource Definition**

648 The CoAPCloudConf Resource is as defined in Table 4.

 649 **Table 4 – CoAPCloudConf Resource**

Example URI	Resource Type Title	Resource Type ID ("rt" value)	Interfaces	Description	Related Functional Interaction
"/example/CoapCloudConfResURI"	CoAPCloudConf	"oic.r.coapcloudconf"	"oic.if.rw", "oic.if.baseline"	Configuration information for connecting to an OCF Cloud. The Resource properties exposed are listed in Table 5.	N/A

650

651

DRAFT

652 Table 5 defines the details for the "oic.r.coapcloudconf" Resource Type.

 653 **Table 5 – oic.r.coapcloudconf Resource Type definition**

Property title	Property name	Value type	Value rule	Unit	Access mode	Mandatory	Description
Auth Provider Name	apn	String	N/A	N/A	RW	No	The name of the Authorisation Provider through which access token was obtained.
OCF Cloud interface URL	cis	String	uri	N/A	RW	Yes	URL of OCF Cloud.
Access Token	at	String	The Access Token is a string of at least one character	N/A	W ¹	Yes (in an UPDATE only)	Access token which is returned by an Authorisation Provider or OCF Cloud.
OCF Cloud UUID	sid	uuid	N/A	N/A	RW	Yes	The identity of the OCF Cloud
Last Error Code during Cloud Provisioning	clec	integer	enum	N/A	R	No	0: No Error, 1: Error response from the OCF Cloud, 2: Failed to connect to the OCF Cloud, 3: Failed to refresh Access Token, 4~254: Reserved, 255: Unknown error

¹ The Access Token is not included in a RETRIEVE response payload. It can only be the target of an UPDATE.

654

655 If the "clec" Property is implemented by a Device it shall have an initial value of 0 ("No error").

 656 **6.2.3 Error Handling**

 657 The "clec" Property of the CoAPCloudConf Resource (i.e. "oic.r.coapcloudconf") is used to indicate
 658 any error that occurred in the cloud configuration process while trying to connect to the OCF Cloud
 659 (using the information populated by the Mediator in the CoAPCloudConf Resource). This is an
 660 optional Property and if implemented, is set by the Device:

 661 – The Device shall set the "clec" Property to 1 if it receives an error response from the OCF Cloud
 662 (e.g. error response from the Cloud).

 663 – The Device shall set the "clec" Property to 2 if there is a failure to connect to the OCF Cloud
 664 (e.g. no reply, timeout, or timeout).

- 665 – The Device shall set the "clec" Property to 3 if it fails to refresh the Access Token (e.g. if it
666 receives an error response during the token refresh procedure).

667 **7 Network and connectivity**


668 A TLS session exists between a Device and the OCF Cloud as specified in IETF RFC 8323; this is
669 established following device configuration as detailed in 8.1.2.3.

DRAFT

670 **8 Functional interactions**

 671 **8.1 Onboarding, Provisioning, and Configuration**

 672 **8.1.1 Overview**

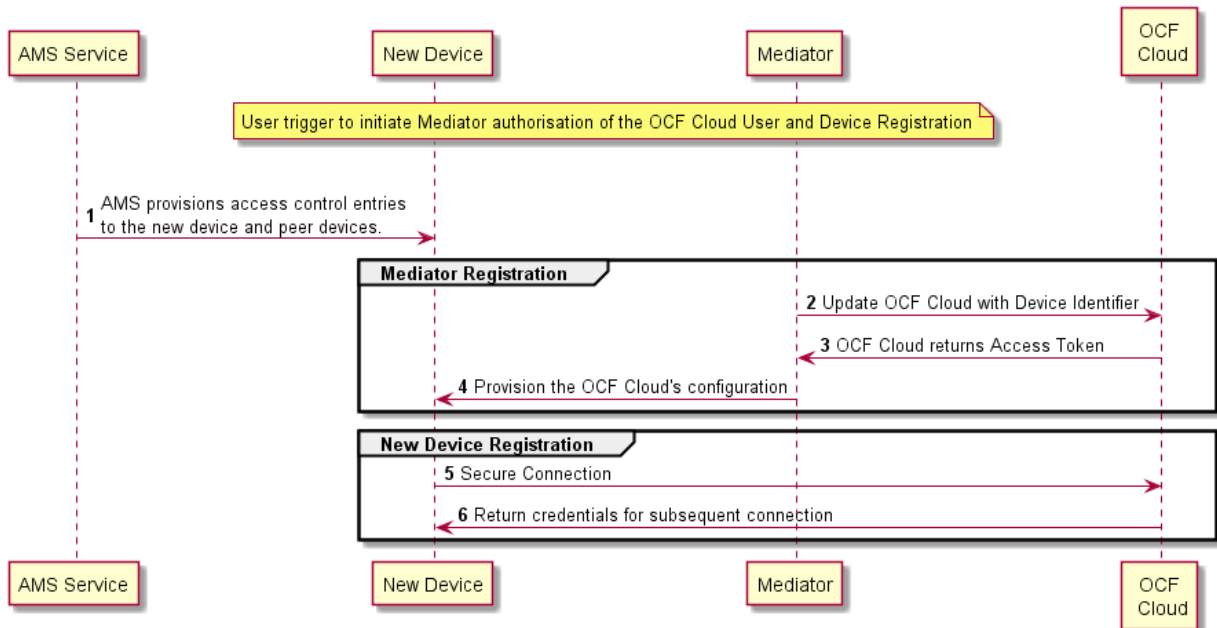 673 Figure 6 provides an overview of the interaction between the different entities to get the Device
 674 registered with the OCF Cloud. A summary of the flow is provided in Table 4.


675

676

Figure 6 – Registration with OCF Cloud

677

678

Table 6 – Device to OCF Cloud Registration Flow

Steps	Description
1	AMS provisions access control entries to the new device and peer devices.
2-3	Mediator obtains the OCF Cloud User's information and authorisation.
4	Mediator provisions the credentials for the Device to connect to the OCF Cloud
5-6	Device connects to the OCF Cloud using manufacturer certificate. The OCF Cloud returns credentials to the Device, used for subsequent connection to the OCF Cloud.

679

 680 **8.1.2 Use of Mediator**

 681 **8.1.2.1 Introduction**

 682 The Mediator is a specialised service that is used for provisioning the "oic.r.coapcloudconf"
 683 Resource, and enabling connection of a headless Device to an OCF Cloud. The Mediator is
 684 specified in OCF Wi-Fi Easy Setup.

685 The Mediator is implemented as part of the OBT (Onboarding Tool); and so could be part of any
686 Device that itself hosts an OBT. A Device is authorized to communicate with an OCF Cloud if a
687 trusted Mediator has provisioned the Device. The Device and Mediator connect over DTLS using
688 credentials from "/oic/sec/cred".

689 As part of Device provisioning, the Mediator sets the following information in the
690 "oic.r.coapcloudconf" Resource exposed by the Device:

- 691 – OCF Cloud Interface URL ("cis") Property
- 692 – OCF Cloud UUID ("sid") Property (to verify Cloud identity)
- 693 – Access Token ("at") Property that is validated by the OCF Cloud
- 694 – Optionally the Authorisation Provider name ("apn") Property through which the Access Token
695 was obtained

696 If an error occurs during the process of registering and authenticating a Device with the OCF Cloud
697 the Mediator may RETRIEVE the "clec" Property if implemented by the "oic.r.coapcloudconf"
698 Resource on the Device to obtain a hint as to the cause of the error.

699 **8.1.2.2 OCF Cloud User Authorisation of the Mediator**

700 The Mediator uses a user authorisation mechanism to enable the OCF Cloud to validate the OCF
701 Cloud User's authorisation and obtain the OCF Cloud User's identity. The Authorisation Provider
702 should be trusted by both the OCF Cloud User and the OCF Cloud. The Mediator may use OAUTH
703 2.0 (see IETF RFC 6749) or another user authentication mechanism to obtain an Access Token as
704 a form of authorisation from an OCF Cloud User via an Authorisation Provider. This authorisation
705 achieves a variety of purposes. Firstly, the authorisation shows OCF Cloud User consent for
706 Mediator to connect to the OCF Cloud. Secondly, the authorisation is used to obtain information to
707 map the Devices to the same OCF Cloud User.

708 A user authorisation mechanism is used to achieve the following:

- 709 – Obtain an Access Token that is validated by the Cloud
- 710 – OCF Cloud User authorisation via an Authorisation Provider; this provides consent to connect
711 to the OCF Cloud.

712 If a different Mediator is used by the same OCF Cloud User, a new Access Token may be obtained
713 from an Authorisation Provider. Mediator Registration with the OCF Cloud

714 The Mediator connects to the OCF Cloud using a provisioned certificate on the Mediator to establish
715 a TLS connection.

716 On its first connection, the Mediator starts the registration process with the OCF Cloud. The
717 Mediator provides the OCF Cloud with the Mediator's Access Token received from the Authorisation
718 Provider in 8.1.2.2 in order to register with the OCF Cloud.

719 The OCF Cloud then verifies the Access Token with the Authorisation Provider. If the Authorisation
720 Provider validates the Access Token successfully, then it will return information about the OCF
721 Cloud User to whom the Access Token belongs. The OCF Cloud generates a unique Access Token
722 for the Mediator (which may be the original Access Token from the Mediator or a new Access Token)
723 and a User ID (i.e. "uid" Property of "oic.r.account") if this is the first instance of registering a
724 Mediator with this OCF Cloud User. The User ID acts as a unique identity for the OCF Cloud User.
725 All instances of a Mediator for the same OCF Cloud User will be associated with the same User ID.
726 This information is returned to the Mediator over TLS. The returned Access Token and User ID are

727 used by the OCF Cloud to identify the Mediator. This returned Access Token is used by the
728 Mediator in subsequent interactions with the OCF Cloud.

729 All Devices registering with the OCF Cloud receive the same User ID from the OCF Cloud when
730 registering with the same Mediator.

731 8.1.2.3 Device Provisioning by the Mediator

732 The Mediator obtains the OCF Cloud User's permission before the Mediator and OCF Cloud interact
733 to preregister the Device with the OCF Cloud. This clause provides an informative description of
734 the expected subsequent exchange between a Mediator and an OCF Cloud.


735 Once the OCF Cloud has associated the Mediator with a User ID, the Mediator can request the
736 OCF Cloud to associate OCF Devices with the same User ID. To register the Device with the OCF
737 Cloud, the Mediator first requests an Access Token for the Device from the OCF Cloud. The
738 Mediator may provide the following information to the OCF Cloud to obtain an Access Token for
739 the Device:

- 740 – Device ID (i.e. "di" Property Value of "/oic/d" of the Device)


741 The OCF Cloud then returns a unique Access Token for the Device. The OCF Cloud maintains a
742 map where Access Token and Mediator-provided Device ID are stored. At the time of Device
743 Registration OCF Cloud validates the Access Token and associates the TLS session with
744 corresponding Device ID. The OCF Cloud may also return an Authorisation Provider Name
745 associated with the Access Token if the Access Token for the Device was created by an entity
746 other than the OCF Cloud.

747 The Mediator provides this Access Token to the Device ("at" Property) via an UPDATE to the
748 Device's "oic.r.coapcloudconf" Resource. The provisioned Access Token is to be treated by Device
749 as an Access Token with "Bearer" token type as defined in IETF RFC 6750. The Mediator also
750 provisions the OCF Cloud URI ("cis" Property), where the OCF Cloud URI can be either pre-
751 configured or provided to the Mediator via OCF Cloud User input. The Mediator further provisions
752 the OCF Cloud UUD ("sid" Property) to the identity of the OCF Cloud. If the OCF Cloud also
753 returned an Authorisation Provider Name in association with the Access Token for the Device then
754 this is also provisioned by the Mediator on the Device ("apn" Property of "oic.r.coapcloudconf").

755 See ISO/IEC 30118-2:2018 clause 7.5.2 for details on the population of ACE2 entries on the Device
756 to allow CRUDN operations from the Mediator and OCF Cloud.

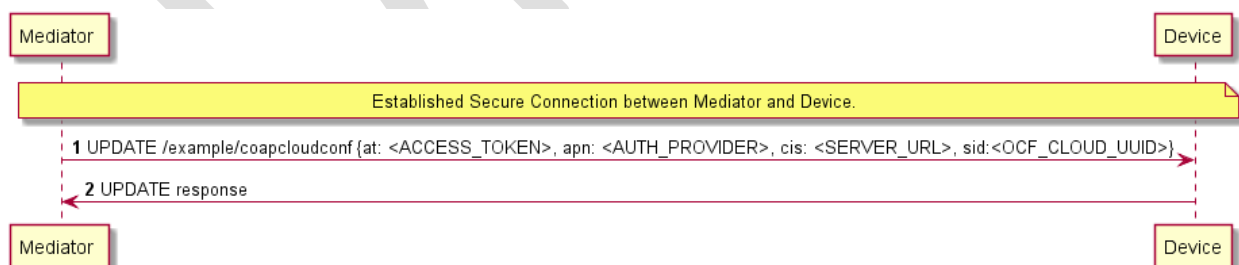

757
758 Figure 7 describes the flow for provisioning of the Device by a Mediator. Table 7 provides additional
759 context around the flow.

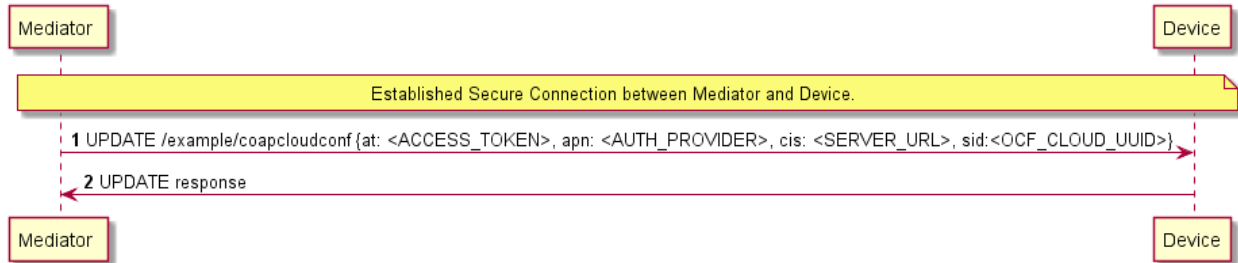

760

761

Figure 7 – Device Provisioning by the Mediator

762

763

Table 7 – Device Provisioning by the Mediator

Steps	Description
1 - 2	Mediator updates the "oic.r.coapcloudconf" Resource on the Device with configuration information to enable the Device to connect to the OCF Cloud

764

765 Please see ISO/IEC 30118-2:2018 clause 7.5.2 for further details on the mapping of Properties
766 between the Device and OCF Cloud.

767 **8.1.3 Device Connection to the OCF Cloud**

768 On conclusion of Device provisioning as defined in 8.1.2.3 and after transitioning to a state of
769 RFNOP (if not already in RFNOP) the Device shall establish a TLS connection with the OCF Cloud
770 as defined in the ISO/IEC 30118-2:2018 clause 10.5. Further see the ISO/IEC 30118-2:2018 clause
771 10.5.3 for additional security considerations.

772 If authentication of the TLS session being established as defined in the ISO/IEC 30118-2:2018 fails,
773 the "clec" Property of the "oic.r.coapcloudconf" Resource on the Device (if supported) shall be
774 updated about the failed state. If authentication succeeds, the Device and OCF Cloud establish an
775 encrypted link in accordance with the negotiated cipher suite. Further, if the TLS connection is lost
776 due to a failure the "clec" Property of the "oic.r.coapcloudconf" Resource on the Device (if
777 supported) should be updated about the failed state (value of "2").

778 If the TLS connection is lost either via a failure or closed by the OCF Cloud then it may be re-
779 established by following the procedures in the ISO/IEC 30118-2:2018 clause 10.5. A Device may
780 automatically attempt to re-establish the TLS connection, alternatively a Device may require some
781 user trigger to initiate the re-establishment of the TLS connection.

782 **8.1.4 Device Registration with the OCF Cloud**

783 The OCF Cloud maintains a map of User IDs ("uid" Property of "oic.r.account"), Device IDs ("di"
784 Property of "oic.r.account") and Access Tokens ("accesstoken" Property of "oic.r.account";
785 populated with the same value as the "at" Property obtained from "oic.r.coapcloudconf") to
786 authenticate Devices connecting to the OCF Cloud.

787 After the TLS connection is established with the OCF Cloud, the Device shall register with the OCF
788 Cloud by sending an UPDATE request to "/oic/sec/account" as defined in clause 13.10 of the
789 ISO/IEC 30118-2:2018. The OCF Cloud consequently associates the TLS connection with the
790 corresponding "uid" and "di" Properties populated in the "/oic/sec/account/" Resource. Any other
791 Device registering with the OCF Cloud is assigned the same User ID by the OCF Cloud when

792 registering with any Mediator associated with that User ID. Device Registration permits a Client to
793 access Resources on the OCF Cloud which are associated with the same User ID as the Client.

794 If the Property values in the UPDATE to "/oic/sec/account" do not match the equivalents provided
795 to the Mediator by the OCF Cloud the OCF Cloud should close the TLS connection with the Device.
796 Note that the OCF Cloud may also apply additional out-of-band measures, for example the OCF
797 Cloud may send an email to the OCF Cloud User for additional verification to register the Device.

798 If the UPDATE operation is accepted by the OCF Cloud, the OCF Cloud responds as defined in
799 clause 13.10 of the ISO/IEC 30118-2:2018.

800 The "accesstoken" Property that is returned in the UPDATE response may be valid for limited
801 duration; in this instance the Device may use the "/oic/sec/tokenrefresh" Resource to renew the
802 "accesstoken" before the Access Token expires at the time specified in the "expiresin" Property.


803 On completion of Device Registration the Device shall send an UPDATE to "/oic/sec/session" as
804 defined in clause 13.11 of the ISO/IEC 30118-2:2018 to ensure that the established TLS session
805 is maintained for subsequent interaction with the OCF Cloud Resource Directory as defined in
806 clause 8.2.

807 **8.2 Resource Publication**


808 An OCF Cloud exposes a Resource Directory as defined in the ISO/IEC 30118-1:2018 clause
809 11.3.6. After a Device is registered with an OCF Cloud, the Device should publish its Resources to
810 the OCF Cloud's Resource Directory following the procedures defined in the ISO/IEC 30118-1:2018
811 clause 11.3.6. The Device and OCF Cloud maintain a persistent TLS connection over which
812 requests received by the OCF Cloud for the Device are routed.

813 The OCF Cloud maintains an internal association between the published Endpoint information from
814 the Device and the Endpoint information that it (the OCF Cloud) exposes in the Links within the
815 OCF Cloud's Resource Directory. The Endpoint exposed by the OCF Cloud for all Resources
816 published to it is that of the OCF Cloud itself and not the publishing Device. These Endpoints use
817 a scheme of "coaps+tcp". The Links within the OCF Cloud's Resource Directory are only identified
818 per the OCF Cloud User Account (User ID). For example, the registered Links are only returned to
819 Client under same User ID with a Server, and not returned to any other Client under a different
820 User ID with the Server.

821 There is potential ambiguity where different instances of Devices from the same vendor (e.g.
822 multiple lights) publish their Resources; this is because the local "href" Link Parameter that is
823 provided to the RD is likely to be the same in each case. In order to avoid this ambiguity the
824 Resource Directory shall prepend the "href" that is published with the Device ID for the publishing
825 Device. Thus ensuring that all requests received by the OCF Cloud have a unique URI per
826 published Resource.

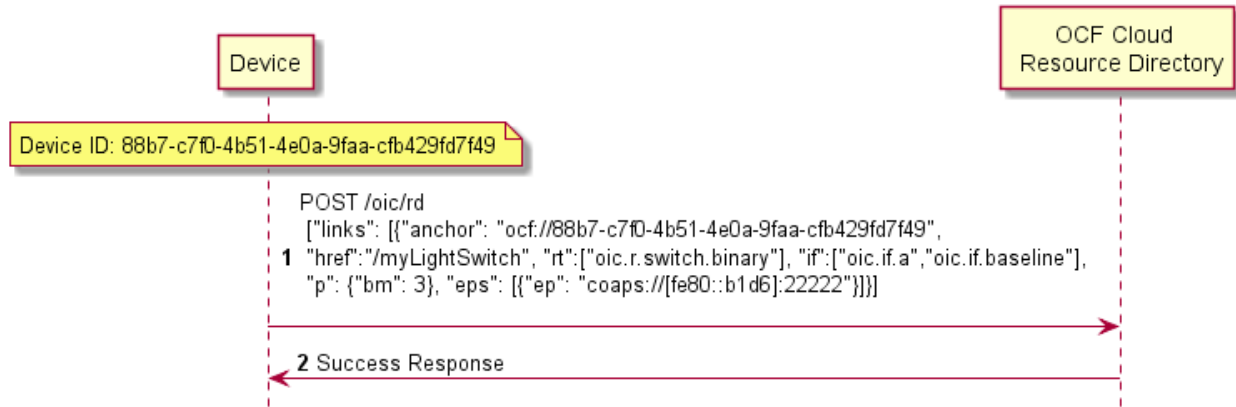

827
828 Figure 8 provides an example showing the provided Device ID from the Device; Figure 9 shows the
829 pre-pending of the Device ID to the "href" Link Parameter in the Resource Directory itself.

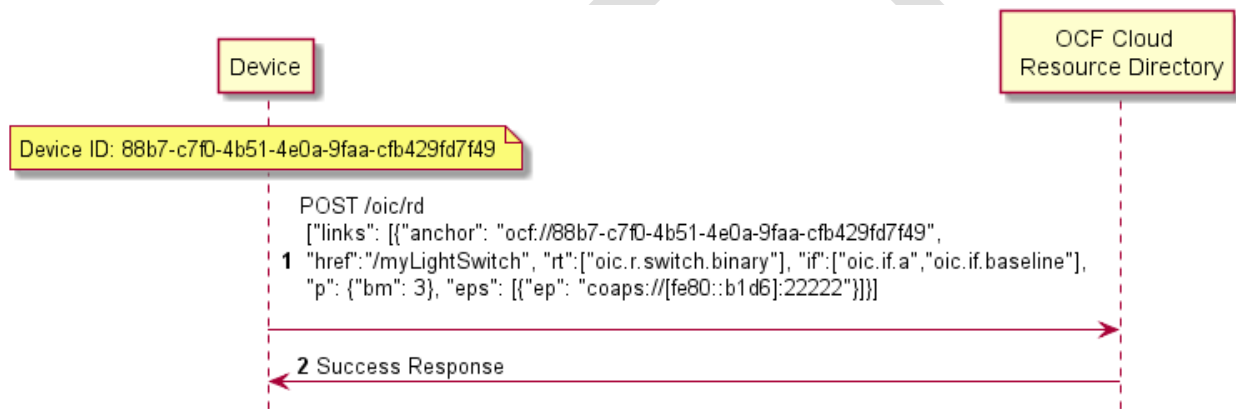

830
831 **Figure 8 – Resource publication to the OCF Cloud**


832 **8.3 Client Registration with the OCF Cloud**

833 A Device acting in the Client role follows the same procedures as a Device in the Server role
834 registering with the OCF Cloud. This Client is associated with a User ID in the same manner in
835 which a Server is associated with the same User ID

836 **8.4 Resource Discovery**

837 A remote Device may query "/oic/res" to discover Resources published to the OCF Cloud. The OCF
838 Cloud's Resource Directory responds with Links for the Resources published to the OCF Cloud by
839 Devices that are registered to the OCF Cloud for the User ID with which the remote Device is
840 associated. The "eps" Link Parameter in the "/oic/res" response are for the OCF Cloud and not the
841 publishing Device.

842 Figure 9 provides an illustrative flow for Resource Discovery, note the population of the 'href' for
843 instance of "oic.r.switch.binary" including the Device ID of the target Device in accordance with 8.2:

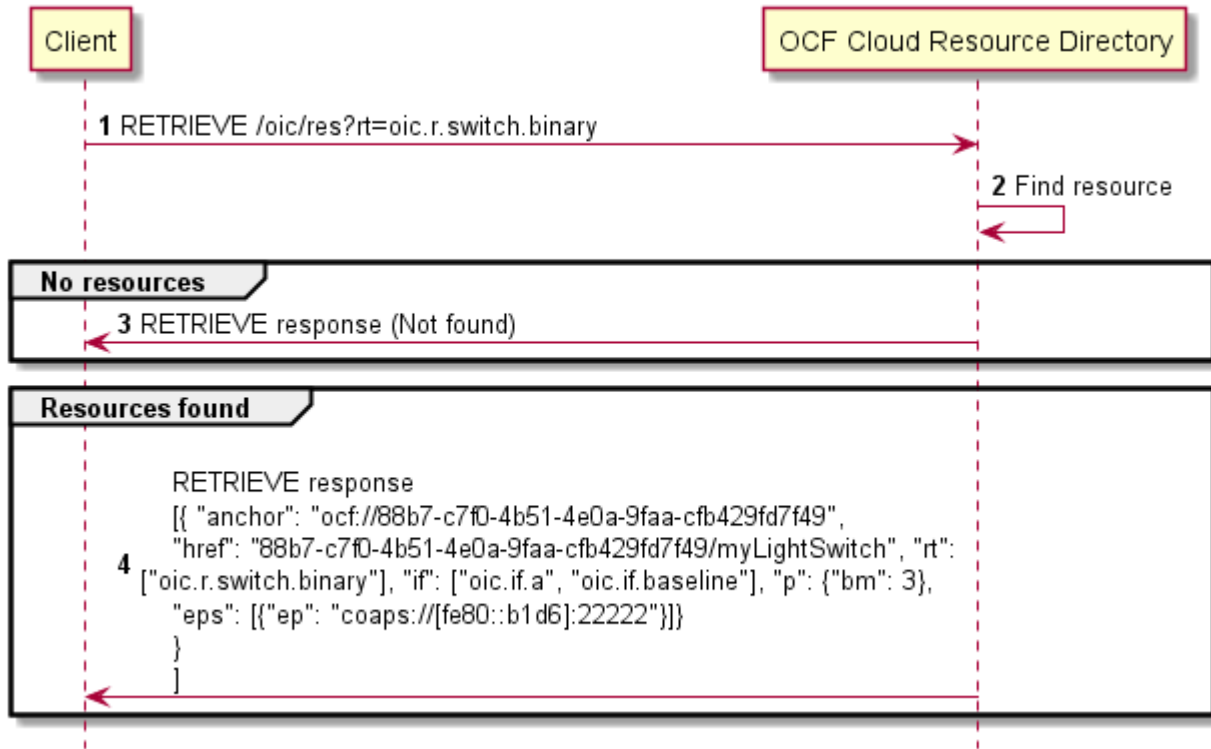


844

845

Figure 9 – Resource discovery through OCF Cloud

846 The OCF Cloud acts as a simple proxy, forwarding the messages to the publishing Devices. The
 847 remote Device sends a RETRIEVE to the OCF Cloud to obtain the content of the Server's published
 848 Resources, the OCF Cloud will route the message to the target Device after first removing the
 849 Device ID that had been prepended to the 'href' Link Parameter by the Cloud RD. Similarly, other
 850 CRUDN operations originated by a Client are routed to the Server via the OCF Cloud. The
 851 publishing Device treats the forwarded request message as a request from the OCF Cloud. The
 852 publishing Device authorises the request as specified in ISO/IEC 30118-2:2018, using the UUID of
 853 the OCF Cloud configured in the "sid" Property of "oic.r.coapcloudconf". The publishing Device
 854 sends a response message to the OCF Cloud, and the OCF Cloud forwards the response to the
 855 Client which sent the corresponding request.

856 Figure 10 illustrates request routing via the OCF Cloud

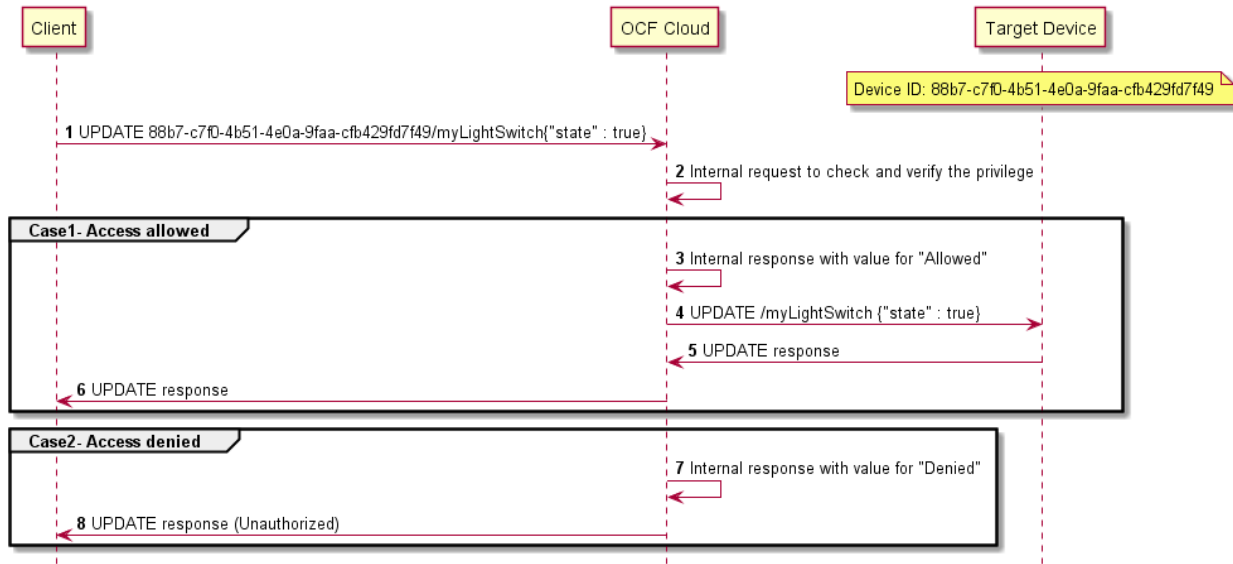

857

858

Figure 10 – Request routing through OCF Cloud

859 If it is not possible for whatever reason for the OCF Cloud to route a Client request to the Server
860 that OCF Cloud may reject the request with a final response (e.g. "Service Unavailable").

861 **8.5 Device Deregistration from the OCF Cloud**

862 To deregister from the OCF Cloud the Device first sends a DELETE operation to the
863 "/oic/sec/account" Resource as defined in the ISO/IEC 30118-2:2018 clause 13.11.

864 Upon completion of deregistration of the Device the OCF Cloud deletes the links for the
865 deregistered Device from the Resource Directory that is exposed by the OCF Cloud.

866 **9 Security**

867 OCF Cloud shall follow the security requirements captured in the ISO/IEC 30118-2:2018.

868

869
 870
 871

Annex A (normative)

Swagger2.0 definitions

872

A.1 List of Resource Type definitions

873

Table A.1 contains the list of defined resources in this document.

874

Table A.1 – Alphabetized list of resources

Friendly Name (informative)	Resource Type (rt)	Clause
Resource Directory	"oic.wk.rd"	A.2
CoAP Cloud Configuration	"oic.r.coapcloudconf"	A.3

875

A.2 Resource directory resource

876

A.2.1 Introduction

 877
 878
 879
 880

Resource to be exposed by any Device that can act as a Resource Directory.
 1) Provides selector criteria (e.g., integer) with GET request
 2) Publish a Link in /oic/res with POST request

881

A.2.2 Well-known URI

882

/oic/rd

883

A.2.3 Resource type

884

The Resource Type is defined as: "oic.wk.rd".

885

A.2.4 OpenAPI 2.0 definition

 886
 887
 888
 889
 890
 891
 892
 893
 894
 895
 896
 897
 898
 899
 900
 901
 902
 903
 904
 905
 906
 907
 908
 909
 910
 911
 912

```
{
  "swagger": "2.0",
  "info": {
    "title": "Resource directory resource",
    "version": "2019-02-22",
    "license": {
      "name": "OCF Data Model License",
      "url":
        "https://github.com/openconnectivityfoundation/core/blob/e28a9e0a92e17042ba3e83661e4c0fbce8bdc4ba/LI
        CENSE.md",
      "x-copyright": "Copyright 2016-2019 Open Connectivity Foundation, Inc. All rights reserved."
    },
    "termsOfService": "https://openconnectivityfoundation.github.io/core/DISCLAIMER.md"
  },
  "schemes": ["http"],
  "consumes": ["application/json"],
  "produces": ["application/json"],
  "paths": {
    "/oic/rd" : {
      "get": {
        "description": "Resource to be exposed by any Device that can act as a Resource
        Directory.\n1) Provides selector criteria (e.g., integer) with GET request\n2) Publish a Link in
        /oic/res with POST request\n",
        "parameters": [
          {"$ref": "#/parameters/rdgetinterface"}
        ],
        "responses": {
```

```

913         "200": {
914             "description": "Respond with the selector criteria - either the set of attributes or
915 the bias factor\n",
916             "x-example": {
917                 "rt": ["oic.wk.rd"],
918                 "if": ["oic.if.baseline"],
919                 "sel": 50
920             },
921             "schema": { "$ref": "#/definitions/rdSelection" }
922         }
923     },
924 },
925 "post": {
926     "description": "Publish the Resource information for the first time in /oic/res. Updates to
927 existing entries are not allowed.\nAppropriates parts of the information, i.e., Links of the
928 published Resources will be discovered through /oic/res.\n1) When a Device first publishes a Link,
929 the request payload to RD may include the Links without an \"ins\" Parameter.\n2) Upon granting the
930 request, the RD assigns a unique instance value identifying the Link among all the Links it
931 advertises\n and sends back the instance value in the \"ins\" Parameter in the Link to the
932 publishing Device.\n",
933     "parameters": [
934         { "$ref": "#/parameters/rdpostinterface" },
935         {
936             "name": "body",
937             "in": "body",
938             "required": true,
939             "schema": { "$ref": "#/definitions/rdPublish" },
940             "x-example": {
941                 "di": "e61c3e6b-9c54-4b81-8ce5-f9039c1d04d9",
942                 "links": [
943                     {
944                         "anchor": "ocf://e61c3e6b-9c54-4b81-8ce5-f9039c1d04d9",
945                         "href": "/myLightSwitch",
946                         "rt": [ "oic.r.switch.binary" ],
947                         "if": [ "oic.if.a", "oic.if.baseline" ],
948                         "p": { "bm": 3 },
949                         "eps": [
950                             { "ep": "coaps://[2001:db8:a::b1d6]:1111", "pri": 2 },
951                             { "ep": "coaps://[2001:db8:a::b1d6]:1122" },
952                             { "ep": "coaps+tcp://[2001:db8:a::123]:2222", "pri": 3 }
953                         ]
954                     },
955                     {
956                         "anchor": "ocf://e61c3e6b-9c54-4b81-8ce5-f9039c1d04d9",
957                         "href": "/myLightBrightness",
958                         "rt": [ "oic.r.brightness" ],
959                         "if": [ "oic.if.a", "oic.if.baseline" ],
960                         "p": { "bm": 3 },
961                         "eps": [
962                             { "ep": "coaps://[[2001:db8:a::123]:2222" }
963                         ]
964                     }
965                 ],
966                 "ttl": 600
967             }
968         }
969     ],
970     "responses": {
971         "200": {
972             "description": "Respond with the same schema as publish with the additional \"ins\"
973 Parameter in the Link.\n",
974             "x-example": {
975                 "di": "e61c3e6b-9c54-4b81-8ce5-f9039c1d04d9",
976                 "links": [
977                     {
978                         "anchor": "ocf://e61c3e6b-9c54-4b81-8ce5-f9039c1d04d9",
979                         "href": "/myLightSwitch",

```

```

980         "rt":      [ "oic.r.switch.binary" ],
981         "if":      [ "oic.if.a", "oic.if.baseline" ],
982         "p":       { "bm": 3 },
983         "eps": [
984             { "ep": "coaps://[2001:db8:a::b1d6]:1111", "pri": 2 },
985             { "ep": "coaps://[2001:db8:a::b1d6]:1122" },
986             { "ep": "coaps+tcp://[2001:db8:a::123]:2222", "pri": 3 }
987         ],
988         "ins":      11235
989     },
990     {
991         "anchor":  "ocf://e61c3e6b-9c54-4b81-8ce5-f9039c1d04d9",
992         "href":    "/myLightBrightness",
993         "rt":      [ "oic.r.brightness" ],
994         "if":      [ "oic.if.a", "oic.if.baseline" ],
995         "p":       { "bm": 3 },
996         "eps": [
997             { "ep": "coaps://[2001:db8:a::123]:2222" }
998         ],
999         "ins":      112358
1000     }
1001 ],
1002     "ttl": 600
1003 },
1004     "schema": { "$ref": "#/definitions/rdPublish" }
1005 }
1006 }
1007 }
1008 }
1009 },
1010     "parameters": {
1011         "rdgetinterface" : {
1012             "in" : "query",
1013             "name" : "if",
1014             "type" : "string",
1015             "enum" : [ "oic.if.baseline" ]
1016         },
1017         "rdpostinterface" : {
1018             "in" : "query",
1019             "name" : "if",
1020             "type" : "string",
1021             "enum" : [ "oic.if.baseline" ]
1022         }
1023     },
1024     "definitions": {
1025         "rdSelection" : {
1026             "properties": {
1027                 "rt" : {
1028                     "description": "Resource Type of the Resource",
1029                     "items": {
1030                         "enum": [ "oic.wk.rd" ],
1031                         "type": "string",
1032                         "maxLength": 64
1033                     },
1034                     "minItems": 1,
1035                     "uniqueItems": true,
1036                     "readOnly": true,
1037                     "type": "array"
1038                 },
1039                 "n" : {
1040                     "$ref":
1041 "https://openconnectivityfoundation.github.io/core/schemas/oic.common.properties.core-
1042 schema.json#/definitions/n"
1043                 },
1044                 "sel" : {
1045                     "description": "A bias factor calculated by the Resource Directory",
1046                     "maximum": 100,

```

```

1047         "minimum": 0,
1048         "readOnly": true,
1049         "type": "integer"
1050     },
1051     "id" : {
1052         "$ref":
1053 "https://openconnectivityfoundation.github.io/core/schemas/oic.common.properties.core-
1054 schema.json#/definitions/id"
1055     },
1056     "if" : {
1057         "description": "The OCF Interfaces supported by this Resource",
1058         "items": {
1059             "enum": [
1060                 "oic.if.baseline"
1061             ],
1062             "type": "string",
1063             "maxLength": 64
1064         },
1065         "minItems": 1,
1066         "readOnly": true,
1067         "uniqueItems": true,
1068         "type": "array"
1069     }
1070 },
1071 "type" : "object",
1072 "required": ["sel"]
1073 },
1074 "rdPublish" : {
1075     "properties": {
1076         "di" : {
1077             "$ref":
1078 "https://openconnectivityfoundation.github.io/core/schemas/oic.links.properties.core-
1079 schema.json#/definitions/di"
1080         },
1081         "ttl" : {
1082             "description": "Time to indicate a RD, i.e. how long to keep this published item.",
1083             "type": "integer"
1084         },
1085         "links" : {
1086             "description": "A set of simple or individual OCF Links.",
1087             "items": {
1088                 "properties": {
1089                     "anchor": {
1090                         "$ref":
1091 "https://openconnectivityfoundation.github.io/core/schemas/oic.links.properties.core-
1092 schema.json#/definitions/anchor"
1093                     },
1094                     "di": {
1095                         "$ref":
1096 "https://openconnectivityfoundation.github.io/core/schemas/oic.links.properties.core-
1097 schema.json#/definitions/di"
1098                     },
1099                     "eps": {
1100                         "$ref":
1101 "https://openconnectivityfoundation.github.io/core/schemas/oic.links.properties.core-
1102 schema.json#/definitions/eps"
1103                     },
1104                     "href": {
1105                         "$ref":
1106 "https://openconnectivityfoundation.github.io/core/schemas/oic.links.properties.core-
1107 schema.json#/definitions/href"
1108                     },
1109                     "if": {
1110                         "description": "The interface set supported by the published resource",
1111                         "items": {
1112                             "enum": [
1113                                 "oic.if.baseline",

```



```

1114         "oic.if.ll",
1115         "oic.if.b",
1116         "oic.if.rw",
1117         "oic.if.r",
1118         "oic.if.a",
1119         "oic.if.s"
1120     ],
1121     "type": "string",
1122     "maxLength": 64
1123 },
1124 "minItems": 1,
1125 "uniqueItems": true,
1126 "type": "array"
1127 },
1128 "ins": {
1129     "$ref":
1130     "https://openconnectivityfoundation.github.io/core/schemas/oic.links.properties.core-
1131     schema.json#/definitions/ins"
1132 },
1133 "p": {
1134     "$ref":
1135     "https://openconnectivityfoundation.github.io/core/schemas/oic.links.properties.core-
1136     schema.json#/definitions/p"
1137 },
1138 "rel": {
1139     "description": "The relation of the target URI referenced by the Link to the context
1140 URI",
1141     "oneOf": [
1142         {
1143             "default": [
1144                 "hosts"
1145             ],
1146             "items": {
1147                 "maxLength": 64,
1148                 "type": "string"
1149             },
1150             "minItems": 1,
1151             "type": "array"
1152         },
1153         {
1154             "default": "hosts",
1155             "maxLength": 64,
1156             "type": "string"
1157         }
1158     ]
1159 },
1160 "rt": {
1161     "description": "Resource Type of the published Resource",
1162     "items": {
1163         "maxLength": 64,
1164         "type": "string"
1165     },
1166     "minItems": 1,
1167     "maxItems": 1,
1168     "uniqueItems": true,
1169     "type": "array"
1170 },
1171 "title": {
1172     "$ref":
1173     "https://openconnectivityfoundation.github.io/core/schemas/oic.links.properties.core-
1174     schema.json#/definitions/title"
1175 },
1176 "type": {
1177     "$ref":
1178     "https://openconnectivityfoundation.github.io/core/schemas/oic.links.properties.core-
1179     schema.json#/definitions/type"
1180 }

```

```

1181     },
1182     "required": [
1183       "href",
1184       "rt",
1185       "if"
1186     ],
1187     "type": "object"
1188   },
1189   "type": "array"
1190 }
1191 },
1192 "type" : "object",
1193 "required": ["di", "links", "ttl"]
1194 }
1195 }
1196 }
1197

```

1198 A.2.5 Property definition

1199 Table A-2 defines the Properties that are part of the "oic.wk.rd" Resource Type.

1200 **Table A-2 – The Property definitions of the Resource with type "rt" = "oic.wk.rd".**

Property name	Value type	Mandatory	Access mode	Description
rt	array: see schema	No	Read Only	Resource Type of the Resource.
n	multiple types: see schema	No	Read Write	
sel	integer	Yes	Read Only	A bias factor calculated by the Resource Directory.
id	multiple types: see schema	No	Read Write	
if	array: see schema	No	Read Only	The OCF Interfaces supported by this Resource.
di	multiple types: see schema	Yes	Read Write	
ttl	integer	Yes	Read Write	Time to indicate a RD, i.e. how long to keep this published item.
links	array: see schema	Yes	Read Write	A set of simple or individual OCF Links.

1201 A.2.6 CRUDN behaviour

1202 Table A-3 defines the CRUDN operations that are supported on the "oic.wk.rd" Resource Type.

1203 **Table A-3 – The CRUDN operations of the Resource with type "rt" = "oic.wk.rd".**

Create	Read	Update	Delete	Notify
	get	post		observe

1204 **A.3 CoAP Cloud Configuration Resource**

1205 **A.3.1 Introduction**

1206 The CoAPCloudConf Resource exposes configuration information for connecting to an OCF Cloud.
1207

1208 **A.3.2 Example URI**

1209 /CoAPCloudConfResURI

1210 **A.3.3 Resource type**

1211 The Resource Type is defined as: "oic.r.coapcloudconf".

1212 **A.3.4 OpenAPI 2.0 definition**

```
1213 {  
1214   "swagger": "2.0",  
1215   "info": {  
1216     "title": "CoAP Cloud Configuration Resource",  
1217     "version": "20190327",  
1218     "license": {  
1219       "name": "OCF Data Model License",  
1220       "url":  
1221         "https://github.com/openconnectivityfoundation/core/blob/e28a9e0a92e17042ba3e83661e4c0fbce8bdc4ba/LI  
1222         CENSE.md",  
1223       "x-copyright": "Copyright 2018-2019 Open Connectivity Foundation, Inc. All rights reserved."  
1224     },  
1225     "termsOfService": "https://openconnectivityfoundation.github.io/core/DISCLAIMER.md"  
1226   },  
1227   "schemes": ["http"],  
1228   "consumes": ["application/json"],  
1229   "produces": ["application/json"],  
1230   "paths": {  
1231     "/CoAPCloudConfResURI?if=oic.if.rw" : {  
1232       "get": {  
1233         "description": "The CoAPCloudConf Resource exposes configuration information for connecting  
1234         to an OCF Cloud.\n",  
1235         "parameters": [  
1236           { "$ref": "#/parameters/interface-all" }  
1237         ],  
1238         "responses": {  
1239           "200": {  
1240             "description": "",  
1241             "x-example":  
1242               {  
1243                 "rt": ["oic.r.coapcloudconf"],  
1244                 "apn": "github",  
1245                 "cis": "coaps+tcp://example.com:443",  
1246                 "sid": "987e6543-a21f-10d1-a112-421345746237",  
1247                 "clec": 0  
1248               },  
1249               "schema": { "$ref": "#/definitions/CoAPCloudConf" }  
1250             }  
1251           }  
1252         },  
1253         "post": {  
1254           "description": "Update properties of the CoAPCloudConf Resource.\n",  
1255           "parameters": [  
1256             { "$ref": "#/parameters/interface-all" },  
1257             {  
1258               "name": "body",  
1259               "in": "body",  
1260               "required": true,  
1261               "schema": { "$ref": "#/definitions/CoAPCloudConfUpdate" } ,  

```

```

1262         "x-example":
1263         {
1264             "at": "0f3d9f7fe5491d54077d",
1265             "apn": "github",
1266             "cis": "coaps+tcp://example.com:443",
1267             "sid" : "987e6543-a21f-10d1-a112-421345746237"
1268         }
1269     },
1270 ],
1271 "responses": {
1272     "200": {
1273         "description" : "",
1274         "x-example":
1275         {
1276             "apn": "github",
1277             "cis": "coaps+tcp://example.com:443",
1278             "sid" : "987e6543-a21f-10d1-a112-421345746237",
1279             "clec": 0
1280         },
1281         "schema": { "$ref": "#/definitions/CoAPCloudConf" }
1282     }
1283 }
1284 },
1285 ],
1286 "/CoAPCloudConfResURI?if=oic.if.baseline" : {
1287     "get": {
1288         "description": "The CoAPCloudConf Resource exposes configuration information for connecting
1289 to an OCF Cloud.\n",
1290         "parameters": [
1291             { "$ref": "#/parameters/interface-all" }
1292         ],
1293         "responses": {
1294             "200": {
1295                 "description" : "",
1296                 "x-example":
1297                 {
1298                     "rt": ["oic.r.coapcloudconf"],
1299                     "if" : ["oic.if.rw", "oic.if.baseline"],
1300                     "apn": "github",
1301                     "cis": "coaps+tcp://example.com:443",
1302                     "sid" : "987e6543-a21f-10d1-a112-421345746237",
1303                     "clec": 0
1304                 },
1305                 "schema": { "$ref": "#/definitions/CoAPCloudConf" }
1306             }
1307         }
1308     },
1309     "post": {
1310         "description": "Update Properties of the CoAPCloudConf Resource.\n",
1311         "parameters": [
1312             { "$ref": "#/parameters/interface-all" },
1313             {
1314                 "name": "body",
1315                 "in": "body",
1316                 "required": true,
1317                 "schema": { "$ref": "#/definitions/CoAPCloudConfUpdate" },
1318                 "x-example":
1319                 {
1320                     "at": "0f3d9f7fe5491d54077d",
1321                     "apn": "github",
1322                     "cis": "coaps+tcp://example.com:443",
1323                     "sid" : "987e6543-a21f-10d1-a112-421345746237"
1324                 }
1325             }
1326         ],
1327         "responses": {
1328             "200": {

```

```

1329         "description" : "",
1330         "x-example":
1331         {
1332             "apn": "github",
1333             "cis": "coaps+tcp://example.com:443",
1334             "sid" : "987e6543-a21f-10d1-a112-421345746237",
1335             "clec": 0
1336         },
1337         "schema": { "$ref": "#/definitions/CoAPCloudConf" }
1338     }
1339 }
1340 }
1341 }
1342 },
1343 "parameters": {
1344     "interface-all" : {
1345         "in" : "query",
1346         "name" : "if",
1347         "type" : "string",
1348         "enum" : ["oic.if.rw","oic.if.baseline"]
1349     }
1350 },
1351 "definitions": {
1352     "CoAPCloudConf" : {
1353         "properties": {
1354             "rt" : {
1355                 "description": "Resource Type of the Resource",
1356                 "items": {
1357                     "enum": ["oic.r.coapcloudconf"],
1358                     "type": "string",
1359                     "maxLength": 64
1360                 },
1361                 "minItems": 1,
1362                 "uniqueItems": true,
1363                 "readOnly": true,
1364                 "type": "array"
1365             },
1366             "n" : {
1367                 "$ref":
1368 "https://openconnectivityfoundation.github.io/core/schemas/oic.common.properties.core-
1369 schema.json#/definitions/n"
1370             },
1371             "cis" : {
1372                 "description": "URL of OCF Cloud",
1373                 "format": "uri",
1374                 "type": "string"
1375             },
1376             "apn" : {
1377                 "description": "The Authorisation Provider through which an Access Token was obtained.",
1378                 "type": "string"
1379             },
1380             "sid" : {
1381                 "$ref": "http://openconnectivityfoundation.github.io/core/schemas/oic.types-
1382 schema.json#/definitions/uuid"
1383             },
1384             "clec" : {
1385                 "description": "Last Error Code during Cloud Provisioning (0: No Error, 1: Error response
1386 from the OCF Cloud, 2: Failed to connect to the OCF Cloud, 3: Failed to refresh Access Token, 4~254:
1387 Reserved, 255: Unknown error)",
1388                 "enum": [
1389                     0,
1390                     1,
1391                     2,
1392                     3,
1393                     255
1394                 ],
1395                 "readOnly": true

```

```

1396     },
1397     "id" : {
1398       "$ref":
1399       "https://openconnectivityfoundation.github.io/core/schemas/oic.common.properties.core-
1400       schema.json#/definitions/id"
1401     },
1402     "if" : {
1403       "description": "The OCF Interfaces supported by this Resource",
1404       "items": {
1405         "enum": [
1406           "oic.if.rw",
1407           "oic.if.baseline"
1408         ],
1409         "type": "string",
1410         "maxLength": 64
1411       },
1412       "minItems": 2,
1413       "uniqueItems": true,
1414       "readOnly": true,
1415       "type": "array"
1416     }
1417   },
1418   "type" : "object",
1419   "required":["cis", "sid"]
1420 },
1421 "CoAPCloudConfUpdate" : {
1422   "properties": {
1423     "cis" : {
1424       "description": "URL of OCF Cloud",
1425       "format": "uri",
1426       "type": "string"
1427     },
1428     "apn" : {
1429       "description": "The Authorisation Provider through which an Access Token was obtained.",
1430       "type": "string"
1431     },
1432     "at" : {
1433       "description": "Access Token which is returned by an Authorisation Provider or OCF
1434       Cloud.",
1435       "type": "string"
1436     },
1437     "sid" : {
1438       "$ref": "http://openconnectivityfoundation.github.io/core/schemas/oic.types-
1439       schema.json#/definitions/uuid"
1440     }
1441   },
1442   "type" : "object",
1443   "required":["cis", "at", "sid"]
1444 }
1445 }
1446 }
1447

```

A.3.5 Property definition

Table A.4 defines the Properties that are part of the "oic.r.coapcloudconf" Resource Type.

Table A.4 – The Property definitions of the Resource with type "rt" = "oic.r.coapcloudconf".

Property name	Value type	Mandatory	Access mode	Description
sid	multiple types: see schema	Yes	Read Write	
rt	array: see schema	No	Read Only	Resource Type of the Resource.

id	multiple types: see schema	No	Read Write	
n	multiple types: see schema	No	Read Write	
cis	string	Yes	Read Write	URL of OCF Cloud.
apn	string	No	Read Write	The Authorisation Provider through which an Access Token was obtained.
if	array: see schema	No	Read Only	The OCF Interfaces supported by this Resource.
clec	multiple types: see schema	No	Read Only	Last Error Code during Cloud Provisioning (0: No Error, 1: Error response from the OCF Cloud, 2: Failed to connect to the OCF Cloud, 3: Failed to refresh Access Token, 4~254: Reserved, 255: Unknown error).
sid	multiple types: see schema	Yes	Read Write	
at	string	Yes	Read Write	Access Token which is returned by an Authorisation Provider or OCF Cloud.
apn	string	No	Read Write	The Authorisation Provider through which an Access Token was obtained.
cis	string	Yes	Read Write	URL of OCF Cloud.

 1451 **A.3.6 CRUDN behaviour**

 1452 Table A.5 defines the CRUDN operations that are supported on the "oic.r.coapcloudconf" Resource
 1453 Type.

 1454 **Table A.5 – The CRUDN operations of the Resource with type "rt" = "oic.r.coapcloudconf".**

Create	Read	Update	Delete	Notify
	get	post		observe

1455